

CC524HF

Double drum vibratory rollers

DYNAPAC

Part of the Atlas Copco Group



Technical data



Masses

Max. operating mass	28,000 lbs
Operating mass (incl. ROPS)	24,900 lbs
Module mass (front/rear)	12,450/12,450 lbs



Propulsion

Speed range	0-7,5 mph
Vertical oscillation	±7°
Theor. gradeability	40 %



Compaction

Centrifugal force (high/low amplitude)	34,650/22,720 lb
Nominal amplitude (high/low)	0.031/0.012 in
Static linear load (front/rear)	162/162 lbs/in
Vibration frequency (high/low amplitude)	3,060/4,020 vpm
Water tank (gal)	238/304/370



Hydraulic system

Driving	Axial piston pump with variable displacement. Axial piston motors (2) with variable displacement.
Vibration	Axial piston pumps (2) with variable displacement. Axial piston motors (2) with constant displacement.
Steering	Gear pump with constant displacement.
Service brake	Hydrostatic in forward and reverse lever.
Parking/ Emergency brake	Failsafe multidisc brake in both drums.



Engine

Manufacturer/Model	Cummins QSB 4.5 III B/T4i
Rated power, SAE J1995	130 hp @ 2,200 rpm
Fuel tank capacity	63 gal

Dynapac USA

3700 East 68th Avenue, Commerce City, CO 80022 Phone: 800-732-6762 Fax: 303-288-8828
Find your local dealer at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



CC524HF

Double drum vibratory rollers

DYNAPAC

Part of the Atlas Copco Group

Technical data

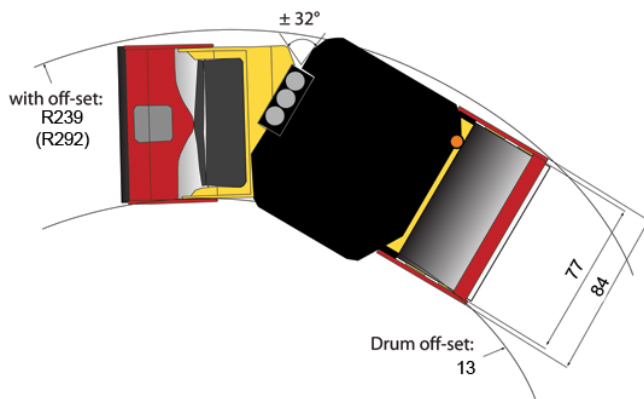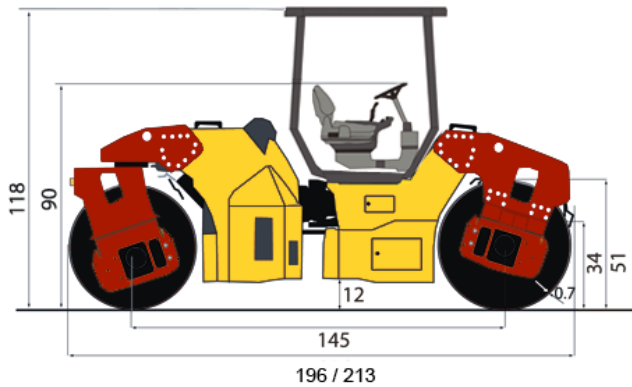

Standard equipment

- Automatic vibration control (AVC)
- Automatic water control (AWC)
- Back-up alarm
- Display: Engine temp, Fuel level, Frequency/impactometer, Hydr. temp, Speedometer, Tachometer, Voltage, VPM, Water level
- Filters for sprinkler system
- Hydraulic check points
- Lunch box holder
- Operator platform, shock mounted
- Pressurized sprinkler system
- ROPS canopy w/suspension seat & 3" seat belt
- Rotating beacon
- Sliding and swiveling operator's platform
- Spring loaded scrapers
- Sprinkler timer
- Sprinkler system additional (Two bars per drum)
- Steering wheel tilt able
- Vandal cover for instrument panel
- Vibration quick stop
- Vibration shut off front or rear drum
- Warning lights: Air cleaner, Brake, Clogged hyd. fluid filter, Engine oil pressure/temp, Hyd oil temp, Low charge, Low fuel
- Working lights, Rops mounted



Optional equipment

- Asphalt Temp Meter
- Compaction Analyzer
- Drum Edge Lights
- Whisper Cab Package

Dynapac USA

3700 East 68th Avenue, Commerce City, CO 80022 Phone: 800-732-6762 Fax: 303-288-8828

Find your local dealer at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

CC524HF

Double drum vibratory rollers

DYNAPAC

Part of the Atlas Copco Group

Technical data



Service and repair kits

Type of kit	P/N	Serial Number/Additional info
50h service kit	4700945805	S/N 384S0007
500h service kit	4700945806	S/N 384S0007
1000h service kit	4700945807	S/N 384S0007
Shock absorber kit	4700945904	
Eccentric shaft kit	4700945903	
Drum rotation kit	4700938891	
Compaction Analyzer for asphalt (DCA-A)	470PP81163	DCA-A COMPACTION ANALYZER FOR ASPHALT, ONLY EQUIPMENT
Edge press, joint cutter disc	470PP81100	EDGE PRESS DEVICE, JOINT CUTTER DISC, 120 MM 4.7 INCH
Edge press, joint cutter disc	470PP81101	EDGE PRESS DEVICE, JOINT CUTTER DISC, 150 MM 5.9 INCH
Tachograph kit	470PP81083	TACHOGRAPH
Tachograph kit	470PP81162	TACHOGRAPH, ONLY INSTRUMENT
Edge press kit	470PP81098	EDGE PRESS, FRONT RIGHT MOUNTED.
Rotating beacon kit	470PP81095	ROTATING BEACON
Working lights kit	470PP81096	Std H3 lights
Working lights kit	470PP81097	Xenon lights
Driving lights kit	470PP81144	



Recommended fluids

Used in	Fluid Type	Volume	Additional info
Drum oil	Dynapac Drum Oil 1000	2 x 15 liter	Change oil every 1000 hours (every 6 months)
Transmission oil	Dynapac Gear Oil 300	2 x 1,5 liter	Change oil after first 50 hours then every 1000 hours (every 6 months)
Engine	Atlas Copco Engine 100	11 liter	Change oil after first 50 hours, then every 500 hours (every 3 months)
Hydraulic system	Atlas Copco Hydraulic 300	40 liter	Change oil every 2000 hours (yearly)

Dynapac USA

3700 East 68th Avenue, Commerce City, CO 80022 Phone: 800-732-6762 Fax: 303-288-8828
Find your local dealer at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.