


# Dynapac DR7X


## Rammers




### Technical data


|  Masses |         |
|---|---------|
| Net mass  | 148 lbs |
| Operating mass (CE)   | 150 lbs |


|  Propulsion |                            |
|--|----------------------------|
| Max. area coverage   | 3,616.8 ft <sup>2</sup> /h |
| Max. working speed   | 65.6 fpm                   |

|  Compaction |                  |
|--|------------------|
| Impact force   | 3,822 lbs /17 kN |
| Vibration frequency  | 600 – 710 vpm    |

|  Engine |                             |
|---|-----------------------------|
| Manufacturer/Model  | Honda GXR 120               |
| Number of cylinders   | 1                           |
| Type  | air cooled gasoline         |
| Emissions according to  | CARB Phase III              |
| Fuel tank capacity  | 1 gal                       |
| Fuel consumption /h, avg.   | 0.2 gal                     |
| Power   | 3.6 HP (2.7 kW) @ 3,600 rpm |

|  Drive system |            |
|--|------------|
| Drive system   | Mechanical |

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.


dynapac\_dr7x\_us-20180622.183743.pdf 2018-06-22 18:37

# Dynapac DR7X

## Rammers



### Technical data

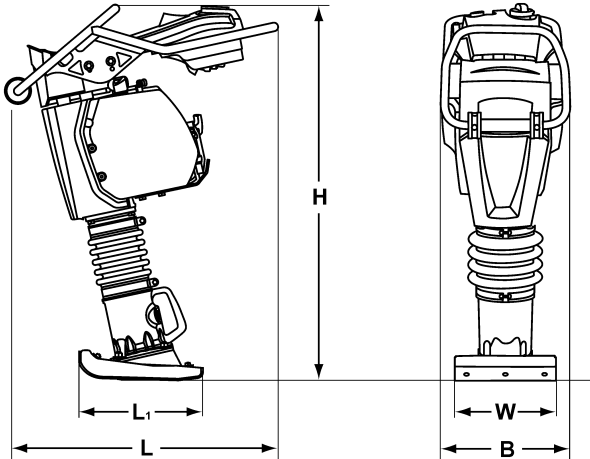

#### Dimensions

|                     |         |
|---------------------|---------|
| B. Width            | 13.8 in |
| H. Height           | 40.6 in |
| L. Length           | 28.7 in |
| L1. Length          | 13.2 in |
| W. Basic shoe width | 11.0 in |



#### Standard equipment

- Infinitely variable frequency
- Hour and rpm display
- Low vibration handle bar
- Multi stage fuel and air filter system
- Self-cleaning air filter housing
- Auto oil level check before start
- Engine protection covers
- Engine & fuel start/stop on the same switch
- Recoil starter
- Loading aid rollers on handle
- One point lift



#### Optional equipment

- Transport device with puncture proof wheels
- Tamper foot widths (6.3-13.0 in)
- Tamper foot extensions
- Special Painting
- Tool kit
- Service Kit
- Operator protection contact
- Breaker Switch

Find us locally at [www.dynapac.us](http://www.dynapac.us)

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.  
The above information is a general description only, all informations are supplied without liability.