



Dynapac FC1400C


Commercial pavers




Technical data


 Masses	
Mass (tractor)	9,300 lbs
Paver weight (incl. standard screed)	12,500 lbs


 Dimensions	
Basic width	8 ft
Working width, max.	14 ft
Working width, hydraulic extendable	14 ft
Working width, minimum (Cut Off Shoe)	1 ft
Front ramp angle	11°


 Capacity	
Theoretical placement capacity	450 t/h
Paving thickness (max/min)	6 in / 0 in


 Material hopper	
Capacity	13,000 lbs
Dumping height, center	21 in
Hopper width, internal	120 in

 Propulsion	
Paving speed	0-140 fpm
Transport speed	3 mph

 Engine	
Manufacturer/Model	Kubota V3600
Emissions according to	EPA T4i/EU3B
Rated power, SAE J1995	50 kW (67 hp) @ 2600 rpm
Electrical system	12V
Fuel tank capacity	13 gal
Engine alternator capacity	90 Amps

 Undercarriage	
Type	Steel track with poly pad
Crawler length	57.1 in
Crawler width	12.0 in
Final drive	Hydrostatic with gear reducer

 Conveyor	
Conveyor type	Dual slat conveyor
Conveyor width	24 in
Conveyor control	On /Off

 Auger	
Auger diameter	9.06 in
Auger control	Automatically with ultrasonic sensor
Extension auger	9 inches, mounted on screed extensions

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines.
The above information is a general description only, all informations are supplied without liability.



dynapac_fc1400c_us-20180522.154416.pdf 2018-05-22 15:44

Dynapac FC1400C

Commercial pavers



Technical data

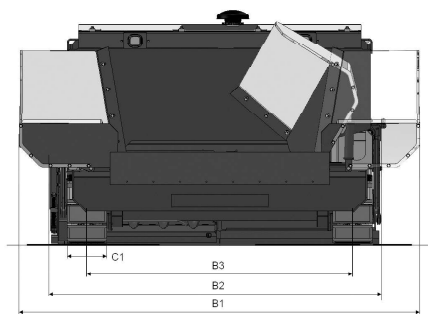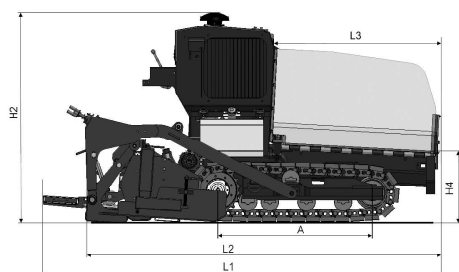

Dimensions

A. Axle track	55 in
B1. Width, max.	125 in
B2. Width, standard	102 in
B3. Width, center of tracks	80 in
C1. Track width	12 in
H2. Height, transport	64 in
H4. Dumping height	21 in
L1. Length, total	136 in
L2. Length, transport	136 in
L3. Length, hopper	60 in



Standard equipment

LED Work Lights, Backup Alarm & Rotating Beacon, Reversible auger and conveyor, Rebuildable wear resistance conveyor floor plates, Segmented High Wear Augers, Dyn@Link Telematics, Ultrasonic sensors auger, Wash down spray system, Dual operator console with conventional electrics



Optional equipment

Cut-Off plates, Truck Hitch, Umbrella



Suitable screeds

Model	Basic width	Working width, hydraulic extendable	Working width, max.	Compacting elements	Heating system
Dynapac VF0814C	8 ft	14 ft	14 ft	Vibration	Propane (LPG)

Find us locally at www.dynapac.us

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.

dynapac_fc1400c_us-20180522.154416.pdf 2018-05-22 15:44