

KOMATSU®

PC240LC-11

Tier 4 Final Engine

HYDRAULIC EXCAVATOR

PC240LC



Photos may include optional equipment.

NET HORSEPOWER

177 HP @ 2000 rpm
132 kW @ 2000 rpm

OPERATING WEIGHT

54,895–56,215 lb
24900–25500 kg

BUCKET CAPACITY

0.76–1.85 yd³
0.58–1.41 m³

WALK-AROUND

PC240LG-11



Photos may include optional equipment.

NET HORSEPOWER

177 HP @ 2000 rpm
132 kW @ 2000 rpm

OPERATING WEIGHT

54,895–56,215 lb
24900–25500 kg

BUCKET CAPACITY

0.76–1.85 yd³
0.58–1.41 m³



PERFORMANCE, DURABILITY & FUEL ECONOMY

New engine and hydraulic pump control technology improves operational efficiency and lowers fuel consumption up to 6%.



A powerful **Komatsu SAA6D107E-3 engine** provides a net output of 132 kW **177 HP**. This engine is EPA Tier 4 Final emissions certified.

Komatsu Variable Geometry Turbocharger (KVG T) uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR) system reduce particulate matter and NOx while providing automatic regeneration that does not interfere with daily operation.

Komatsu's Closed-center Load Sensing System (CLSS) provides quick response and smooth operation to maximize productivity.

Enhanced working modes are designed to match engine speed, pump delivery, and system pressure to the application.

KOMTRAX® equipped machines can send location, SMR and operation maps to a secure website or smart phone utilizing wireless technology. Machines also relay error codes, cautions, maintenance items, fuel & Diesel Exhaust Fluid (DEF) levels, and much more.

Large LCD color monitor panel:

- 7" high resolution screen
- Provides "Eco-Guidance" for fuel efficient operation
- Enhanced attachment control

Rearview monitoring system (standard)

Equipment Management Monitoring System (EMMS) continuously monitors machine operation and vital systems to identify machine issues and assist with troubleshooting.

Enhanced working environment

- High back, heated air suspension operator seat with new adjustable arm rests
- Integrated ROPS cab design
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard
- Aux jack and (2) 12V power outlets

Wide access service doors provide easy access for ground level maintenance.

Guardrails (standard) on both sides provide more convenient access to the upper structure.

Battery disconnect switch allows a technician to disconnect the power supply before servicing the machine.

Komatsu designed and manufactured components

Swing out cooler design provides easy access to service and clean the cooler assembly.

Komatsu Auto Idle Shutdown helps reduce idle time and reduce operating costs.

Operator Identification System key can track machine operation for multiple operators.

PERFORMANCE FEATURES

PG240LG-11

KOMATSU NEW ENGINE TECHNOLOGIES


New Tier 4 Final Engine

The Komatsu SAA6D107E-3 engine is EPA Tier 4 Final emissions certified and provides exceptional performance while reducing fuel consumption. Based on Komatsu proprietary technologies developed over many years, this new diesel engine reduces nitrogen oxides (NOx) by more than 80% when compared to Tier 4 interim levels. Through the in-house development and production of engines, electronics, and hydraulic components, Komatsu has achieved great advancements in technology, providing high levels of performance and efficiency in virtually all applications.

Technologies Applied to New Engine



Heavy-duty aftertreatment system

This new system combines a Komatsu Diesel Particulate Filter (KDPF) and Selective Catalytic Reduction (SCR). The SCR NOx reduction system injects the correct amount of Diesel Exhaust Fluid (DEF) at the proper rate, thereby decomposing NOx into non-toxic water vapor (H₂O) and nitrogen gas (N₂).

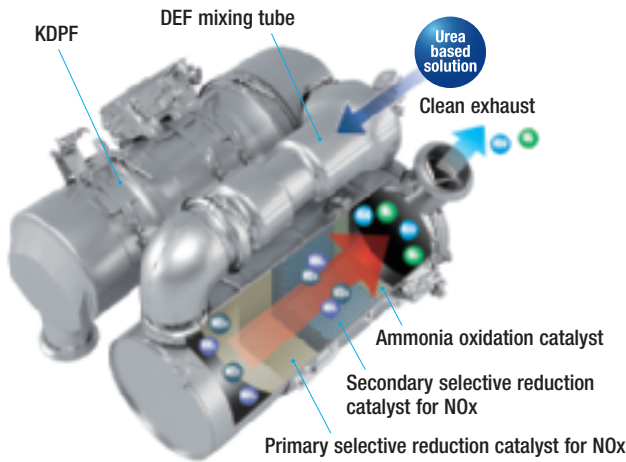

Heavy-duty cooled Exhaust Gas Recirculation (EGR) system

The system recirculates a portion of exhaust gas into the air intake and lowers combustion temperatures, thereby reducing NOx emissions. EGR gas flow has been decreased for Tier 4 Final with the addition of SCR technology. The system achieves a dynamic reduction of NOx, while helping reduce fuel consumption below Tier 4 Interim levels.

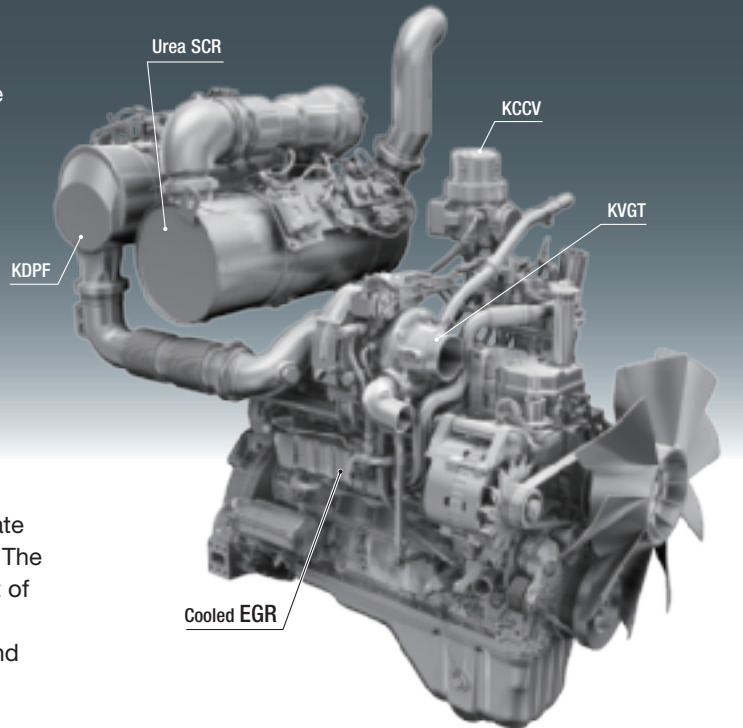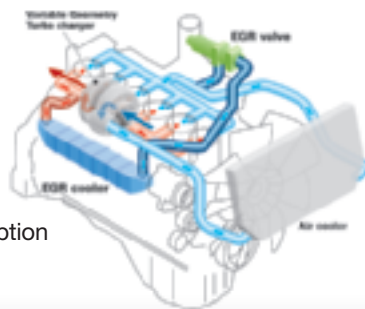


Advanced Electronic Control System

The electronic control system performs high-speed processing of all signals from sensors installed in the vehicle providing total control of equipment in all conditions of use. Engine condition information is displayed via an on-board network to the monitor inside the cab, providing necessary information to the operator. Additionally, managing the information via KOMTRAX helps customers keep up with required maintenance.

Komatsu Variable Geometry Turbocharger (KVG) system

The KVG system features proven Komatsu design hydraulic technology for variable control of air-flow and supplies optimal air according to load conditions. The upgraded version provides better exhaust temperature management.

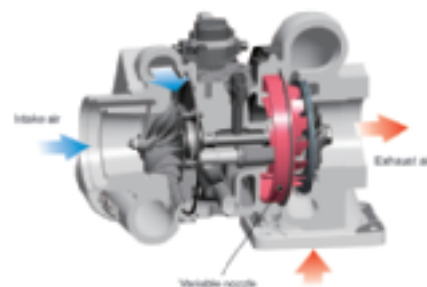


Komatsu Auto Idle Shutdown

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions. The amount of time before the engine is shutdown can be easily programmed from 5 to 60 minutes.



Heavy-Duty High-Pressure Common Rail (HPCR) Fuel Injection System

The system is designed to achieve an optimal injection of high-pressure fuel by means of computerized control, providing close to complete combustion to reduce PM emissions. While this technology is already used in current engines, the new system uses high pressure injection, thereby reducing both PM emissions and fuel consumption over the entire range of engine operating conditions. The Tier 4 Final engine has advanced fuel injection timing for reduced fuel consumption and lower soot levels.

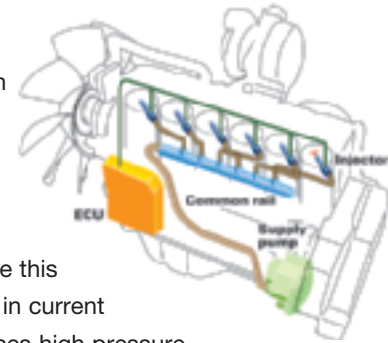

Fuel Consumption

Reduced by 6%

(vs PC240LC-10 Based on typical work pattern
Collected via KOMTRAX)

This fuel consumption data is the result compared actual measured value using the prototype machine.



PERFORMANCE FEATURES

Increased Work Efficiency

Powerful digging force

With the one-touch Power Max. function digging force has been further increased. (8.5 seconds of operation)

Maximum arm crowd force (ISO)

121 kN(12.3t) ➔ **129 kN(13.2t) 7% UP**
(with Power Max.)

Maximum bucket digging force (ISO)

159 kN(16.2t) ➔ **172 kN(17.5t) 8% UP**
(with Power Max.)

Measured with Power Max. function, 3045 mm arm and ISO rating



Large Displacement High Efficiency Pump


Large displacement hydraulic implement pumps provide high flow output at lower engine RPM as well as operation at the most efficient engine speed.



Working Mode Selection

The PC240LC-11 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC240LC-11 features an attachment mode (ATT/E) that allows operators to run attachments while in Economy mode.

Working Mode	Application	Advantage
P	Power mode	<ul style="list-style-type: none"> •Maximum production/power •Fast cycle times
E	Economy mode	<ul style="list-style-type: none"> •Good cycle times •Better fuel economy
L	Lifting mode	<ul style="list-style-type: none"> •Increases hydraulic pressure
B	Breaker mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow
ATT/P	Attachment Power mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow, 2-way •Power mode
ATT/E	Attachment Economy mode	<ul style="list-style-type: none"> •Optimum engine rpm, hydraulic flow, 2-way •Economy mode

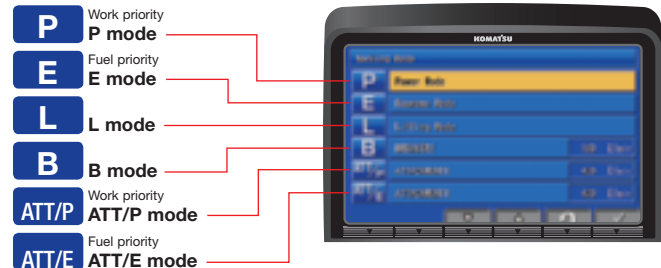

High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross sectional areas and large one piece steel castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. A standard HD boom design provides increased strength and reliability.





Comfortable Working Space

Wide spacious cab

The wide spacious cab includes a heated air suspension seat with reclining backrest. The seat height and position are easily adjusted using a pull-up lever. The armrest position is easily adjusted together with the console. Reclining the seat further enables it to be fully laid back with the headrest attached.

Arm rest with simple height adjustment function

A knob and plunger on the armrests allows easy height adjustment without the use of tools.



Low vibration with cab damper mounting

Automatic climate control

Pressurized cab

Auxiliary input jack

Connecting a regular audio device to the auxiliary jack allows the operator to hear the sound from the stereo speakers installed in the cab.



Standard Equipment


Sliding window glass (left side)



Radio, ashtray



Remote intermittent wiper with windshield washer



Cigarette lighter



Opening & closing skylight



Magazine box & cup holder



Defroster (conforms to the ISO standard)



One-touch storable front window lower glass



WORKING ENVIRONMENT

PC240LG-11

LARGE HIGH RESOLUTION LCD MONITOR



New Monitor Panel Interface Design

An updated large high resolution LCD color monitor enables accurate and smooth work. The interface has been redesigned to display key machine information in a new user friendly interface. A rear view camera and an DEF level gauge display have been added to the default main screen. The interface has a function that enables the main screen mode to be switched, thus enabling the optimum screen information for the particular work situation to be displayed.

Indicators


- | | |
|------------------------------------|-----------------------------|
| 1 Auto-decelerator | 8 Fuel gauge |
| 2 Working mode | 9 DEF level gauge |
| 3 Travel speed | 10 Service meter, clock |
| 4 ECO gauge | 11 Fuel consumption gauge |
| 5 Camera display | 12 Guidance icon |
| 6 Engine coolant temperature gauge | 13 Function switches |
| 7 Hydraulic oil temperature gauge | 14 Camera direction display |
| | 15 DEF level caution lamp |

Basic operation switches

- | | |
|-------------------------|-------------------------|
| 1 Auto-decelerator | 4 Buzzer cancel |
| 2 Working mode selector | 5 Wiper |
| 3 Travel speed selector | 6 Window washer |
| | 7 Auto climate controls |

Switchable Display Modes

The main screen display mode can be changed by pressing the pressing the F3 key.

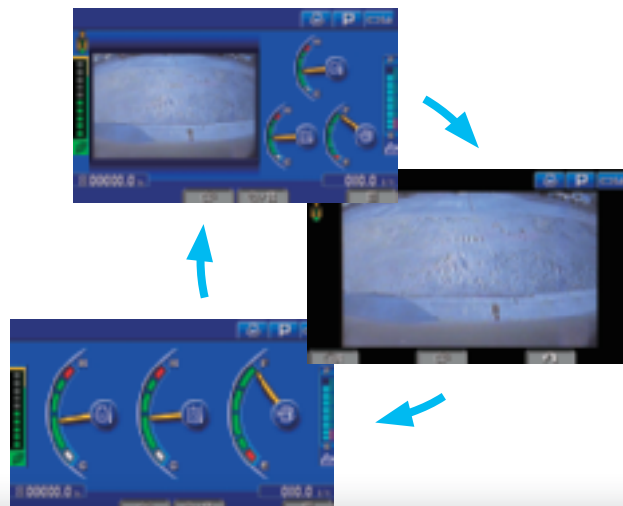

Visual user menu

Pressing the F6 key on the main screen displays the user menu screen. The menus are grouped for each function, and use easy-to-understand icons which enable the machine to be operated easily.



- | | |
|---------------------------------------|--------------------|
| 1 Energy saving guidance | 2 Machine settings |
| 3 Aftertreatment devices regeneration | 4 SCR information |
| 5 Maintenance | 6 Monitor setting |
| | 7 Message check |


Support Efficiency Improvement

ECO guidance

While the machine is operating, ECO guidance pops up on the monitor screen to notify the operator of the status of the machine in real time.

ECO gauge & fuel consumption gauge

The monitor screen is provided with an ECO gauge and also a fuel consumption gauge which is displayed continuously. In addition, the operator can set any desired target value of fuel consumption (within the range of the green display), enabling the machine to be operated with better fuel economy.

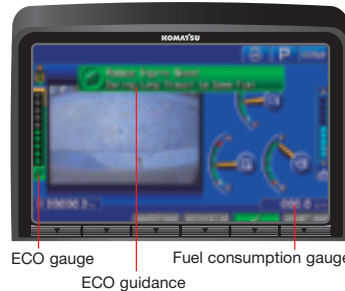

ECO gauge Fuel consumption gauge
ECO guidance


Operator Identification Function

An operator identification ID can be set up for each operator, and used to manage operation information of individual machines using KOMTRAX data. Data sent from KOMTRAX can be used to analyze operation status by operator as well as by machine.



Operation record, fuel consumption history, and ECO guidance record

The ECO guidance menu enables the operator to check the operation record, fuel consumption history and ECO guidance record from the ECO guidance menu, using a single touch, thus enabling the total fuel consumption to be reduced.



Operation record



Fuel consumption history




ECO guidance record



MAINTENANCE FEATURES


Centralized engine check points

Locations of the engine oil check and filters are integrated into one side to allow easy maintenance and service.

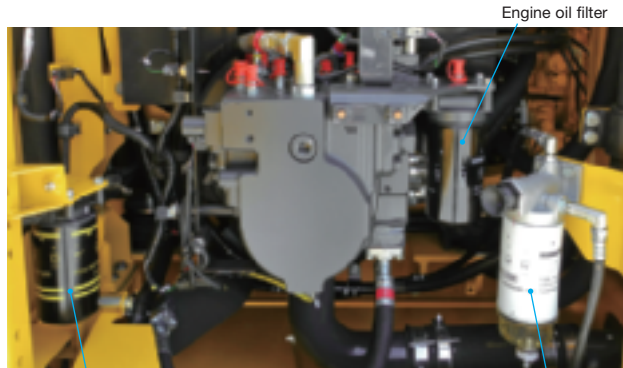

Battery disconnect switch

A standard battery disconnect switch allows a technician to disconnect the power supply and lock out before servicing the machine.

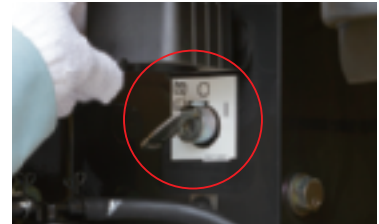

Easy to access air conditioner filter

Washable cab floor mat

Sloping track frame

Utility space

Easy cleaning of cooling unit


Reverse-rotation function of the hydraulic driven fan facilitates cleaning of the cooling unit.

Fuel pre-filter with water separator

Electric fuel priming pump

High efficiency fuel filter with water separator

Easy access to engine oil filter, engine oil, Eco drain valve, fuel drain valve and water separator drain valve

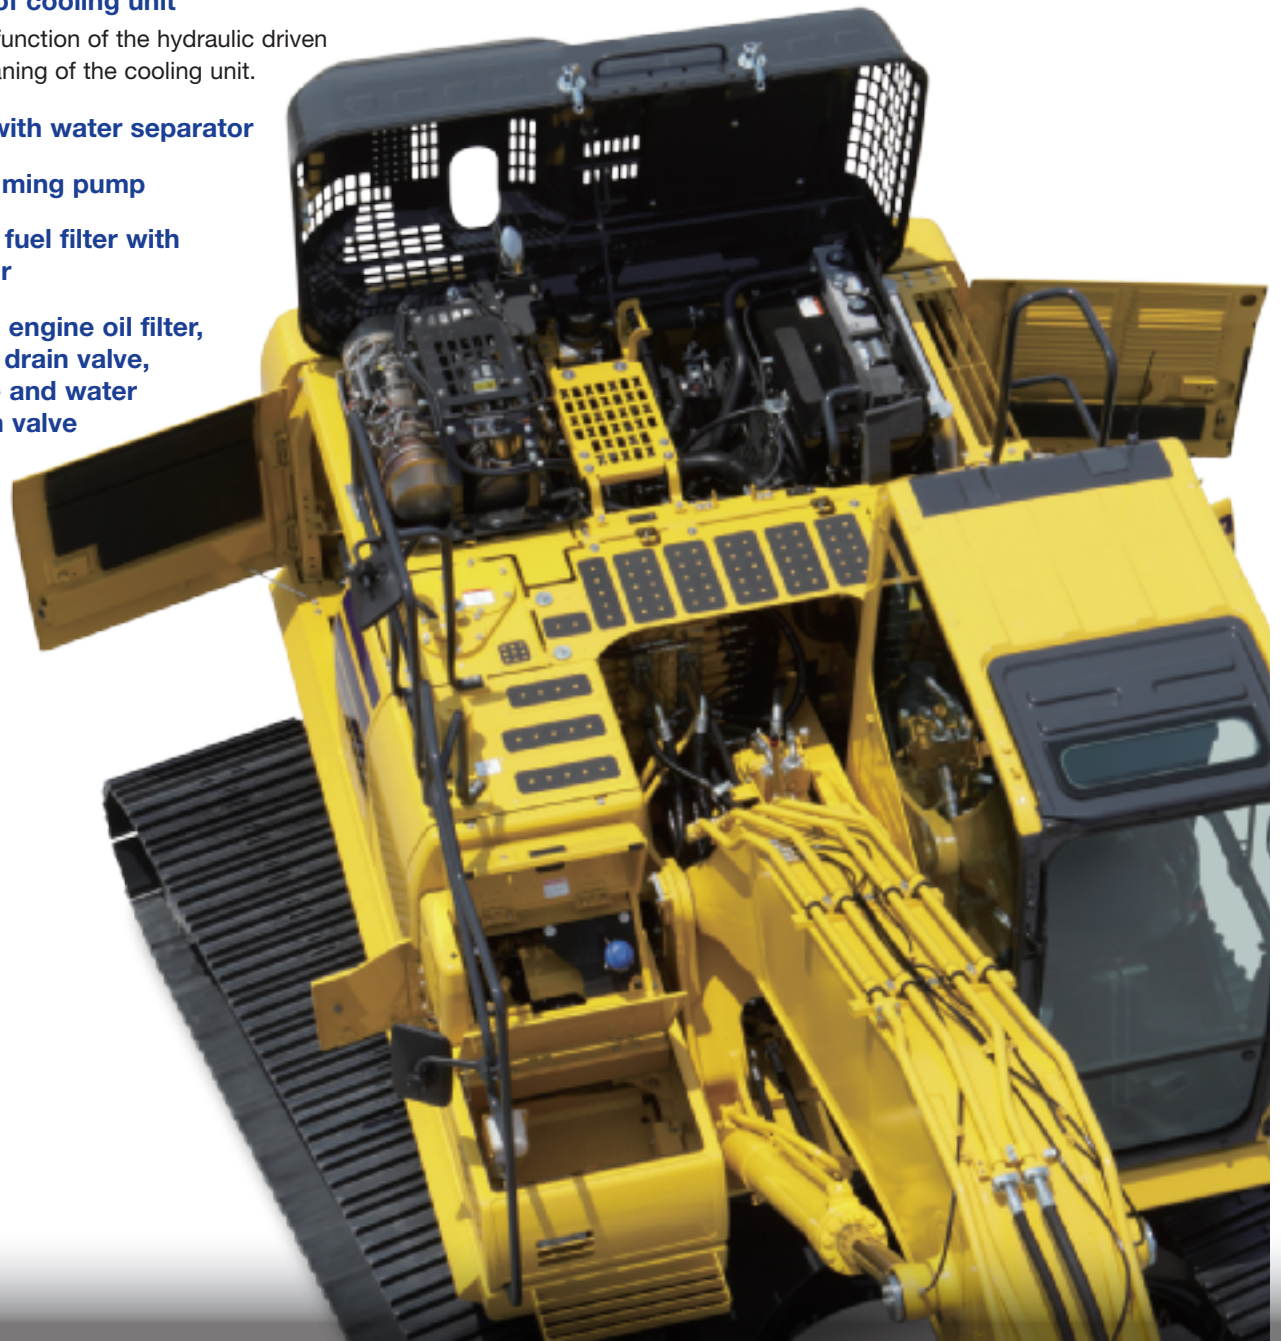

PC240LC-11

Long-life oils, filters

High performance filters are used in the hydraulic circuit and engine. By increasing the oil and filter replacement intervals, maintenance costs can be significantly reduced.

Engine oil & Engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours



Hydraulic oil filter (Eco-white element)

Large capacity air cleaner

Large capacity air cleaner is comparable to that of larger machines. The larger air cleaner can extend air cleaner life during long-term operation and helps prevent early clogging, and resulting power loss. A radial seal design is used for reliability.

Diesel Exhaust Fluid (DEF) tank

A large tank volume extends operating time before refilling and is installed on the right front stairway for ease of access.



Maintenance Information

“Maintenance time caution lamp” display

When the remaining time to maintenance becomes less than 30 hours*, a maintenance time monitor appears. Pressing the F6 key switches the monitor to the maintenance screen.

* : The setting can be changed within the range between 10 and 200 hours.



Maintenance screen

Manual Stational Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel. A soot level indicator is displayed to show how much soot is trapped in the KDPF.



Soot level indicator

Aftertreatment device regeneration screen

Supports the DEF level and refill timing

The DEF level gauge is displayed continuously on the right side of the monitor screen. In addition, when DEF level is low, DEF low level guidance messages appear in pop up displays to inform the operator in real time.




DEF level gauge

DEF low level guidance

DT-type connectors

Sealed DT-type electrical connectors provide high reliability, water and dust resistance.

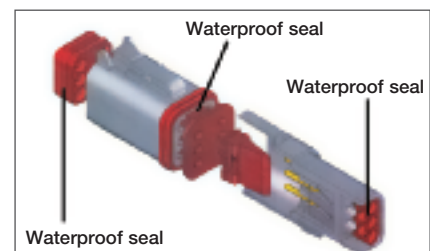

GENERAL FEATURES

PC240LG-11

ROPS CAB STRUCTURE

ROPS Cab (ISO 12117-2)

The machine is equipped with a ROPS cab that conforms to ISO 12117-2 for excavators as standard equipment. It also satisfies the requirements for Level 1 Operator Protective Guard (OPG) and top guard (ISO 10262).




Rear View Monitoring System

A new rear view monitoring system display has a rear view camera image that is continuously displayed together with the gauges and important vehicle information. This enables the operator to carry out work while easily checking the surrounding area.



Low Vibration with Viscous Cab Mounts

The PC240LC-11 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

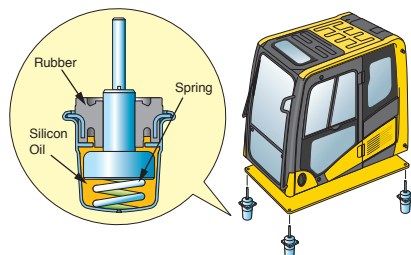

General Features


Secondary engine shut down switch at base of seat to shutdown the engine.



Left and right side hand rails



Seat belt caution indicator



Lock lever

Seat belt retractable

Tempered & tinted glass

Large mirrors

Slip-resistant plates

Thermal and fan guards

Pump/engine room partition

Travel alarm

Large cab entrance step



KOMTRAX EQUIPMENT MONITORING

GET THE WHOLE STORY WITH
KOMTRAX[®]

✓ WHAT

- KOMTRAX is Komatsu's remote equipment monitoring and management system
- KOMTRAX **continuously monitors and records** machine health and operational data
- Information such as fuel consumption, utilization, and a detailed history **lowering owning and operating cost**

✓ WHO

- KOMTRAX is **standard** equipment on all Komatsu construction products

✓ WHEN

- Know when your machines are **running or idling** and make decisions that will improve your fleet utilization
- Detailed movement records ensure you know when and where your equipment is moved
- Up to date records allow you to **know when maintenance is due** and help you plan for future maintenance needs

✓ WHERE

- KOMTRAX data **can be accessed virtually anywhere** through your computer, the web or your smart phone
- Automatic alerts keep fleet managers up to date on the latest machine notifications

✓ WHY

- Knowledge is power - **make informed decisions** to manage your fleet better
- Knowing your idle time and fuel consumption will help maximize your machine efficiency
- **Take control of your equipment** - any time, anywhere



KOMTRAX[®]

For construction and compact equipment.

KOMTRAX Plus[™]

For production and mining class machines.

KOMATSU PARTS & SERVICE SUPPORT



Every new Komatsu Tier 4 Final construction machine is covered.

The Komatsu CARE program covers all new Komatsu Tier 4 Final construction equipment, whether rented, leased or purchased. For the first 3 years or 2,000 hours, whichever occurs first, you'll receive:

- Regular service at 500, 1,000, 1,500 and 2,000-hr. intervals
- DEF tank breather element replacement at 1,000 hours
- DEF and CCV filters replacement at 2,000 hours
- 50-point inspection by factory-trained technician at each scheduled interval
- Technician labor
- Fluids, oils, coolant, filters, SCR screen, tank breather and parts
- Technician travel to and from your equipment location

Plus complimentary KDPF replacement and SCR system service for 5 years-no hours limits.

Service will be performed by a Komatsu Distributor and only Komatsu genuine fluids and filters will be used.

Komatsu CARE® services are available from every Komatsu Distributor in the U.S. and Canada.



Komatsu CARE® – Extended Coverage

- Extended Coverage can provide peace of mind by protecting customers from unplanned expenses that effect cash flow
- Purchasing extended coverage locks-in the cost of covered parts and labor for the coverage period and helps turn these into fixed costs



Komatsu Parts Support

- 24/7/365 to fulfill your parts needs
- 9 parts Distribution Centers strategically located across the U.S. and Canada
- Distributor network of more than 300 locations across U.S. and Canada to serve you
- Online part ordering through Komatsu eParts
- Remanufactured components with same-as-new warranties at a significant cost reduction



Komatsu Oil and Wear Analysis (KOWA)

- KOWA detects fuel dilution, coolant leaks, and measures wear metals
- Proactively maintain your equipment
- Maximize availability and performance
- Can identify potential problems before they lead to major repairs
- Reduce life cycle cost by extending component life

SPECIFICATIONS



ENGINE

Model..... Komatsu SAA6D107E-3*
 Type Water-cooled, 4-cycle, direct injection
 Aspiration..... Turbocharged, aftercooled, cooled EGR
 Number of cylinders..... 6
 Bore 107 mm **4.21"**
 Stroke 124 mm **4.88"**
 Piston displacement.....6.69 ltr **408 in³**
 Horsepower:
 SAE J1995.....Gross 141 kW **189 HP**
 ISO 9249 / SAE J1349 Net 132 kW **177 HP**
 Rated rpm..... 2000
 Fan drive method for radiator cooling Mechanical
 Governor All-speed control, electronic
 *EPA Tier 4 Final emissions certified



HYDRAULICS

Type HydraMind (Hydraulic Mechanical Intelligence New Design) system, closed-center system with load sensing valves and pressure compensated valves
 Number of selectable working modes 6
 Main pump:
 Type.....Variable displacement piston type
 Pumps for.....Boom, arm, bucket, swing, and travel circuits
 Maximum flow 475 ltr/min **125.5 gal/min**
 Supply for control circuit..... Self-reducing valve
 Hydraulic motors:
 Travel 2 x axial piston motors with parking brake
 Swing 1 x axial piston motor with swing holding brake
 Relief valve setting:
 Implement circuits 37.3 MPa 380 kg/cm² **5,400 psi**
 Travel circuit..... 37.3 MPa 380 kg/cm² **5,400 psi**
 Swing circuit..... 28.9 MPa 295 kg/cm² **4,190 psi**
 Pilot circuit..... 3.2 MPa 33 kg/cm² **470 psi**
 Hydraulic cylinders:
 (Number of cylinders – bore x stroke x rod diameter)
 Boom . 2–135 mm x 1335 mm x 95 mm **5.3" x 52.6" x 3.7"**
 Arm ... 1–140 mm x 1635 mm x 100 mm **5.5" x 64.4" x 3.9"**
 Bucket ..1–130 mm x 1020 mm x 90 mm **5.1" x 40.2" x 3.5"**



DRIVES AND BRAKES

Steering control.....Two levers with pedals
 Drive method Hydrostatic
 Maximum drawbar pull 202 kN 20570 kg **45,349 lb**
 Gradeability.....70%, 35°
 Maximum travel speed: High..... 5.5 km/h **3.4 mph**
 (Auto-Shift) Mid..... 4.1 km/h **2.5 mph**
 (Auto-Shift) Low 3.0 km/h **1.9 mph**
 Service brake Hydraulic lock
 Parking brake.....Mechanical disc brake



SWING SYSTEM

Drive method Hydrostatic
 Swing reduction..... Planetary gear
 Swing circle lubrication Grease-bathed
 Service brake..... Hydraulic lock
 Holding brake/Swing lock..... Mechanical disc brake
 Swing speed 11.7 rpm
 Swing torque..... 8065 kg•m **58,334 ft lbs**



UNDERCARRIAGE

Center frame X-frame
 Track frame Box-section
 Seal of track.....Sealed track
 Track adjuster Hydraulic
 Number of shoes (each side) 51
 Number of carrier rollers (each side) 2
 Number of track rollers (each side) 10



COOLANT & LUBRICANT CAPACITY (REFILLING)

Fuel tank 400 ltr **105.7 U.S. gal**
 Coolant 38 ltr **10 U.S. gal**
 Engine..... 23.1 ltr **6.1 U.S. gal**
 Final drive, each side..... 5.0 ltr **1.3 U.S. gal**
 Swing drive 7.2 ltr **1.9 U.S. gal**
 Hydraulic tank..... 132 ltr **34.9 U.S. gal**
 Hydraulic system..... 244 ltr **64.4 U.S. gal**
 DEF tank 39.4 ltr **10.4 U.S. gal**



OPERATING WEIGHT (APPROXIMATE)

Operating weight includes 5850 mm **19'2"** one-piece boom, 3045 mm **10'0"** arm, SAE heaped 1.2 m³ **1.57 yd³** bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.

Triple-Grouser Shoes	Operating Weight	Ground Pressure
700 mm	24,900 kg	0.43 kg/cm ²
28"	54,900 lb	6.1 psi
800 mm	25200 kg	0.38 kg/cm ²
31.5"	55,500 lb	5.4 psi

Component Weights

Arm including bucket cylinder and linkage
 3045 mm **10'0"** arm assembly 1222 kg **2,694 lb**
 3046 mm **10'0"** HD arm assembly 1318 kg **2,906 lb**
 3500 mm **11'6"** arm assembly 1442 kg **3,179 lb**
 One piece boom including arm cylinder
 6150 mm **20'2"** boom assebmly 2219 kg **4,892 lb**
 6150 mm **20'2"** boom assebmly2325 kg **5,126 lb**
 Boom cylinders x 2 210 kg **463 lb**
 Counterweight 4920 kg **10,847 lb**
 1.2 m³ **1.57 yd³** bucket - 42" width 988 kg **2,178 lb**


SPECIFICATIONS



DIMENSIONS

Arm Length	3045 mm	10'0"	3500 mm	11'6"
A Overall length	9965 mm	32'8"	9990	32'9"
B Length on ground (transport)	5390 mm	17'8"	4950	16'3"
C Overall height (to top of boom)*	3185 mm	10'5"	3270	10'9"
D Overall width	3280 mm	10'9"		
E Overall height (to top of cab)*	3055 mm	10'0"		
F Overall height (to top of handrail)*	3150 mm	10'4"		
G Ground clearance, counterweight	1100 mm	3'7"		
H Ground clearance, minimum	440 mm	1'5"		
I Tail swing radius	3020 mm	9'11"		
J Track length on ground	3845 mm	12'7"		
K Track length	4640 mm	15'3"		
L Track gauge	2580 mm	8'6"		
M Width of crawler	3280 mm	10'9"		
N Shoe width	700 mm	2'4"		
O Grouser height	26 mm	0'1"		
P Machine cab height	2265 mm	7'5"		
Q Machine height to top of engine cover	2780 mm	9'1"		
R Machine upper width	2850 mm	9'4"		
S Distance, swing center to rear end	2985 mm	9'10"		

* : Including grouser height

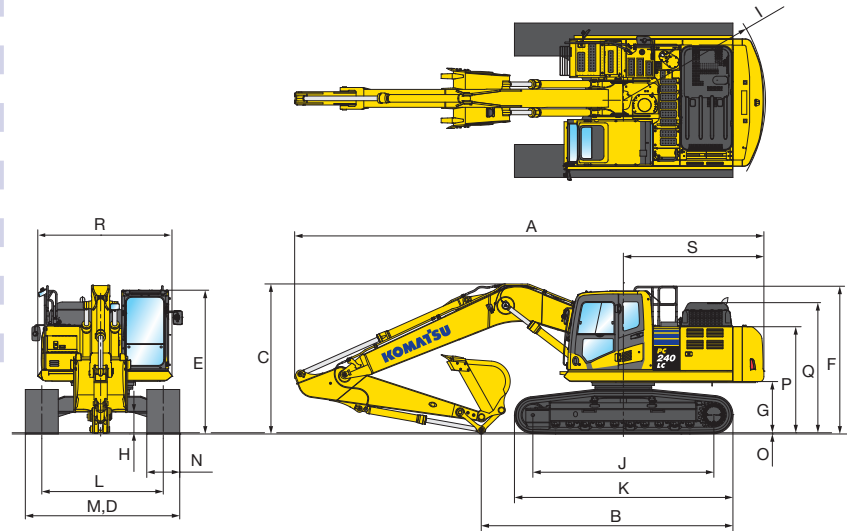

PC240LG-11



BACKHOE BUCKET, ARM AND BOOM COMBINATION


Bucket Type	Bucket				5.85 m (29'2") Boom	
	Capacity	Width	Weight	3.0 m (10'0")	3.5 m (11'6")	
Komatsu TL	0.58 m ³	0.76 yd ³	610 mm 24"	687 kg 1514 lb	●	●
	0.78 m ³	1.02 yd ³	762 mm 30"	807 kg 1779 lb	●	●
	0.99 m ³	1.29 yd ³	914 mm 36"	907 kg 2000 lb	●	●
	1.20 m ³	1.57 yd ³	1067 mm 42"	949 kg 2178 lb	○	○
	1.41 m ³	1.85 yd ³	1219 mm 48"	1045 kg 2399 lb	□	□
Komatsu HP	0.58 m ³	0.76 yd ³	610 mm 24"	812 kg 1791 lb	●	●
	0.78 m ³	1.02 yd ³	762 mm 30"	931 kg 2053 lb	●	●
	0.99 m ³	1.29 yd ³	914 mm 36"	1054 kg 2323 lb	●	●
	1.20 m ³	1.57 yd ³	1067 mm 42"	1154 kg 2545 lb	○	□
	1.41 m ³	1.85 yd ³	1219 mm 48"	1278 kg 2817 lb	□	○
Komatsu HPS	0.58 m ³	0.76 yd ³	610 mm 24"	870 kg 1917 lb	●	●
	0.78 m ³	1.02 yd ³	762 mm 30"	1020 kg 2248 lb	●	●
	0.99 m ³	1.29 yd ³	914 mm 36"	1162 kg 2562 lb	●	●
	1.20 m ³	1.57 yd ³	1067 mm 42"	1282 kg 2827 lb	○	□
	1.41 m ³	1.85 yd ³	1219 mm 48"	1425 kg 3142 lb	○	○
Komatsu HPX	0.58 m ³	0.76 yd ³	610 mm 24"	987 kg 2177 lb	●	●
	0.78 m ³	1.02 yd ³	762 mm 30"	1138 kg 2508 lb	●	●
	0.99 m ³	1.29 yd ³	914 mm 36"	1280 kg 2822 lb	●	○
	1.20 m ³	1.57 yd ³	1067 mm 42"	1400 kg 3087 lb	□	□
	1.41 m ³	1.85 yd ³	1219 mm 48"	1543 kg 3402 lb	○	○

● - Used with material weights up to 3,500 lb/yd³ - Quarry/rock/high abrasion applications
 □ - Used with material weights up to 2,500 lb/yd³ - General construction

○ - Used with material weights up to 3,000 lb/yd³ - Tough digging applications
 ○ - Used with material weights up to 2,000 lb/yd³ - Light materials applications
 X - Not useable



WORKING RANGE

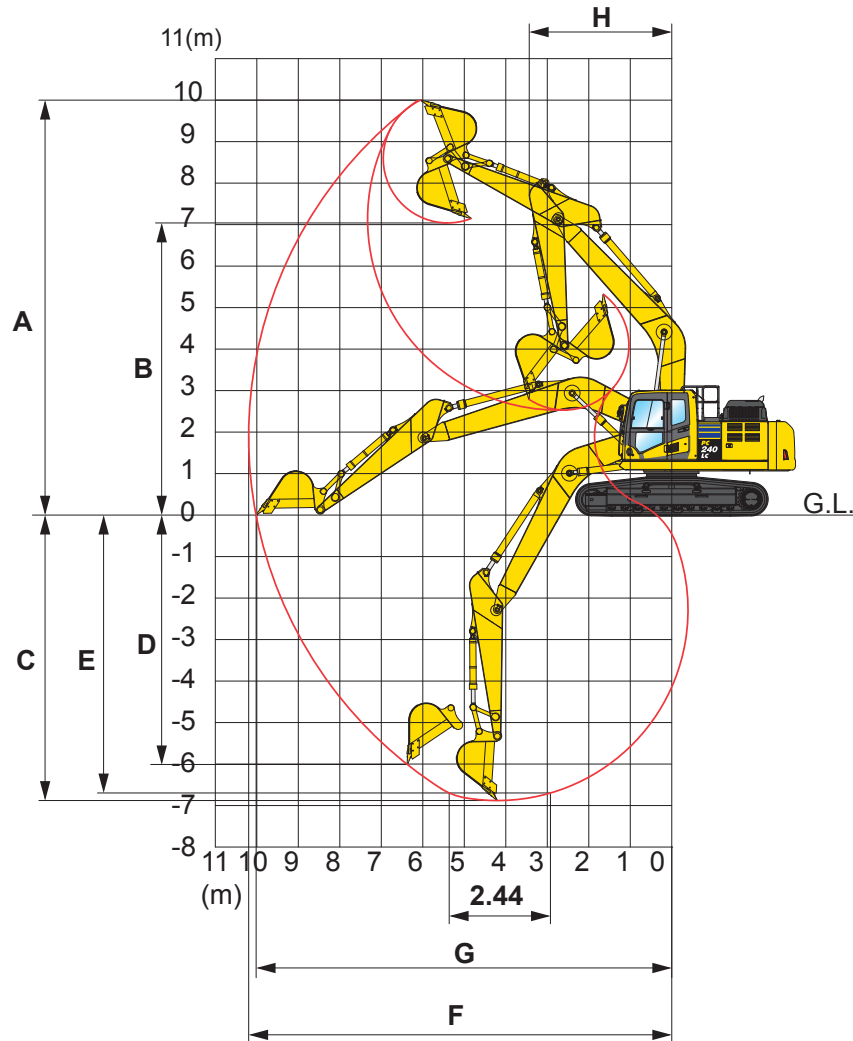


		Arm Length			
		3045 mm	10'0"	3500 mm	11'6"
A	Max. digging height	10000 mm	32'10"	10300 mm	33'10"
B	Max. dumping height	7035 mm	23'1"	7360 mm	24'2"
C	Max. digging depth	6920 mm	22'8"	7320 mm	24'0"
D	Max. vertical wall digging depth	6010 mm	19'9"	6230 mm	20'5"
E	Max. digging depth for 8° level bottom	6700 mm	22' 0"	7150 mm	23'5"
F	Max. digging reach	10180 mm	33'5"	10580 mm	34'9"
G	Max. digging reach at ground level	10020 mm	32'10"	10420 mm	34'2"
H	Min. swing radius	3450 mm	11'4"	3340 mm	10'11"
SAE rating	Bucket digging force at power max.	152 kN		152 kN	
		15500 kg / 34,171 lb		15500 kg / 34,171 lb	
SAE rating	Arm crowd force at power max.	119 kN		107 kN	
		12100 kg / 26,752 lb		10900 kg / 24,055 lb	
ISO rating	Bucket digging force at power max.	172 kN		172 kN	
		17500 kg / 38,667 lb		17500 kg / 38,667 lb	
ISO rating	Arm crowd force at power max.	129 kN		110 kN	
		13200 kg / 29,000 lb		11200 kg / 24,729 lb	

LIFT CAPACITIES



LIFTING CAPACITY WITH LIFTING MODE

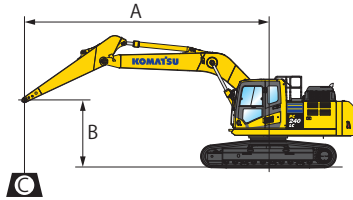

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

Conditions:

- Boom length: 5850 mm 19' 2" one-piece boom
- Bucket: None
- Lifting mode: On


Arm: 3045 mm 10'0" Bucket: None Shoes: 700 mm 28" triple arouser Unit: kg lb

B	A	MAX		1.5 m 5'		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		⊗ MAX	
		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m	6.5 m									* 13200	* 13200			* 10400	* 10400
25'	21'									* 5950	* 5950			* 4700	* 4700
6.1 m	7.5 m									* 14100	* 14100			* 9800	* 9800
20'	25'									* 6400	* 6400			* 4450	* 4450
4.6 m	8.2 m					* 17700	* 17700	* 15900	15200	* 15200	10900	* 9800	9700		
15'	27'					* 8050	* 8050	* 7200	6900	* 6900	4950	* 4450	4400		
3.0 m	8.6 m					* 23600	22000	* 18700	14600	15400	10600	* 10100	8900		
10'	28'					* 10700	10000	* 8450	6600	6950	4800	* 4600	4050		
1.5 m	8.6 m					* 29100	20800	20900	14000	15000	10300	* 10800	8700		
5'	28'					* 13200	9400	9450	6350	6800	4650	* 4900	3950		
0 m	8.4 m			* 17300	* 17300	32200	20100	20400	13500	14800	10100	* 12100	8800		
0'	28'			* 7850	* 7850	14600	9100	9250	6150	6700	4550	* 5450	4000		
-1.5 m	7.9 m	* 18200	* 18200	* 28400	* 28400	32000	19800	20200	13300	14700	10000	13900	9500		
-5'	26'	* 8250	* 8250	* 12850	* 12850	14500	9000	9150	6050	6650	4500	6300	4300		
-3.0 m	7.1 m	* 29700	* 29700	* 43600	38900	32100	19900	20200	13400			16400	11100		
-10'	23'	* 13450	* 13450	* 19750	17650	14550	9050	9150	6050			7450	5050		
-4.6 m	5.7 m			* 39100	* 39100	* 27700	20400					* 21700	15200		
-15'	19'			* 17750	* 17750	* 12600	9250					* 9800	6900		

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



LIFTING CAPACITY WITH LIFTING MODE

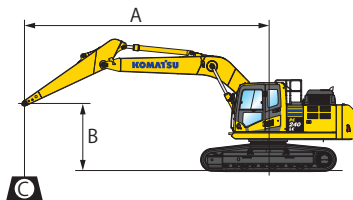

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

Conditions:

- Boom length: 5850 mm 19' 2" one-piece boom
- Bucket: None
- Lifting mode: On


Arm: 3045 mm 10'0" Bucket: None Shoes: 800 mm 31.5" triple grouser Unit: kg lb

B	A	MAX		1.5 m 5'		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		⊗ MAX	
		Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m	7.0 m									* 13200	* 13200			* 10400	* 10400
25'	23'									* 5950	* 5950			* 4700	* 4700
6.1 m	8.0 m									* 14100	* 14100			* 9800	* 9800
20'	26'									* 6400	* 6400			* 4450	* 4450
4.6 m	8.6 m					* 17700	* 17700	* 15900	15300	* 15200	11000	* 9800	9800		
15'	28'					* 8050	* 8050	* 7200	6950	* 6900	5000	* 4450	4400		
3.0 m	9.0 m					* 23600	22200	* 18700	14700	15500	10700	* 10100	9000		
10'	29'					* 10700	10100	* 8450	6650	7050	4850	* 4600	4100		
1.5 m	9.0 m					* 29100	21000	21100	14100	15200	10400	* 10800	8800		
5'	30'					* 13200	9500	9550	6400	6900	4700	* 4900	3950		
0 m	8.8 m			* 17300	* 17300	* 32400	20300	20600	13700	14900	10200	* 12100	8900		
0'	29'			* 7850	* 7850	* 14700	9200	9350	6200	6750	4600	* 5450	4050		
-1.5 m	8.3 m	* 18200	* 18200	* 28400	* 28400	32300	20000	20400	13500	14800	10100	14100	9600		
-5'	27'	* 8250	* 8250	* 12850	* 12850	14650	9100	9250	6100	6750	4550	6400	4350		
-3.0 m	7.5 m	* 29700	* 29700	* 43600	39300	* 32100	20100	20400	13500			16600	11200		
-10'	25'	* 13450	* 13450	* 19750	17850	* 14550	9150	9250	6100			7550	5100		
-4.6 m	6.2 m			* 39100	* 39100	* 27700	20600					* 21700	15400		
-15'	20'			* 17750	* 17750	* 12600	9350					* 9800	6950		

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



LIFTING CAPACITY WITH LIFTING MODE

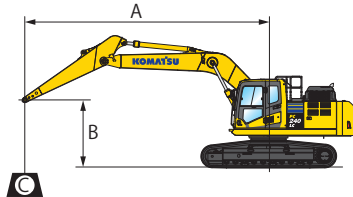

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

Conditions:


- Boom length: 5850 mm 19' 2" one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 3500 mm 11'6"		Bucket: None				Shoes: 700 mm 28" triple arouser				Unit: kg lb			
B	A	1.5 m 5'		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		⊗ MAX	
	MAX	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'	7.0 m 23'							* 12100	* 12100			* 8800	* 8800
								* 5500	* 5500			* 4000	* 4000
6.1 m 20'	8.0 m 26'							* 12500	* 12500	* 11200	10900	* 8400	* 8400
								* 5650	* 5650	* 5100	4950	* 3850	* 3850
4.6 m 15'	8.6 m 28'							* 14300	* 14300	* 13900	10700	* 8400	* 8400
								* 6500	* 6500	* 6300	4850	* 3800	* 3800
3.0 m 10'	9.0 m 29'			* 32300	* 32300	* 21100	* 21100	* 17100	14400	15200	10400	* 8700	8100
				* 14650	* 14650	* 9600	* 9600	* 7750	6550	6900	4700	* 3950	3700
1.5 m 5'	9.0 m 30'					* 27000	20500	* 20200	13700	14800	10000	* 9300	7900
						* 12200	9300	* 9150	6200	6700	4550	* 4200	3550
0 m 0'	8.8 m 29'			* 19300	* 19300	* 30900	19500	20000	13100	14400	9700	* 10300	8000
				* 8750	* 8750	* 14000	8850	9050	5950	6550	4400	* 4650	3600
-1.5 m -5'	8.3 m 27'	* 17200	* 17200	* 27400	* 27400	31200	19100	19700	12800	14300	9600	* 12000	8500
		* 7800	* 7800	* 12400	* 12400	14150	8700	8900	5800	6450	4350	* 5450	3850
-3.0 m -10'	7.5 m 25'	* 26600	* 26600	* 39400	37500	31300	19200	19700	12800			14600	9800
		* 12050	* 12050	* 17850	17050	14200	8700	8900	5800			6600	4450
-4.6 m -15'	6.2 m 20'			* 41300	38500	* 28900	19600	20100	13200			19400	12800
				* 18750	17450	* 13100	8900	9100	5950			8800	5800

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



LIFTING CAPACITY WITH LIFTING MODE

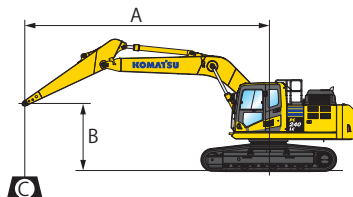

- A: Reach from swing center
- B: Bucket hook height
- C: Lifting capacity
- Cf: Rating over front
- Cs: Rating over side
- ⊗: Rating at maximum reach

Conditions:

- Boom length: 5850 mm 19' 2" one-piece boom
- Bucket: None
- Lifting mode: On

Arm: 3500 mm 11'6"		Bucket: None				Shoes: 800 mm 31.5" triple grouser				Unit: kg lb			
B	A	1.5 m 5'		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		⊗ MAX	
	MAX	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'	7.0 m 23'							* 12100	* 12100			* 8800	* 8800
								* 5500	* 5500			* 4000	* 4000
6.1 m 20'	8.0 m 26'							* 12500	* 12500	* 11200	11000	* 8400	* 8400
								* 5650	* 5650	* 5100	5000	* 3850	* 3850
4.6 m 15'	8.6 m 28'							* 14300	* 14300	* 13900	10800	* 8400	* 8400
								* 6500	* 6500	* 6300	4900	* 3800	* 3800
3.0 m 10'	9.0 m 29'			* 32300	* 32300	* 21100	* 21100	* 17100	14500	* 15300	10500	* 8700	8200
				* 14650	* 14650	* 9600	* 9600	* 7750	6600	* 6950	4750	* 3950	3700
1.5 m 5'	9.0 m 30'					* 27000	20700	* 20200	13800	14900	10100	* 9300	7900
						* 12200	9400	* 9150	6250	6750	4600	* 4200	3600
0 m 0'	8.8 m 29'			* 19300	* 19300	* 30900	19700	20200	13300	14600	9800	* 10300	8100
				* 8750	* 8750	* 14000	8950	9150	6000	6600	4450	* 4650	3650
-1.5 m -5'	8.3 m 27'	* 17200	* 17200	* 27400	* 27400	31600	19400	19900	13000	14400	9700	* 12000	8600
		* 7800	* 7800	* 12400	* 12400	14300	8800	9000	5900	6550	4400	* 5450	3900
-3.0 m -10'	7.5 m 25'	* 26600	* 26600	* 39400	37900	31600	19400	19900	12900			14700	9900
		* 12050	* 12050	* 17850	17200	14350	8800	9000	5850			6700	4500
-4.6 m -15'	6.2 m 20'			* 41300	38800	* 28900	19800	20300	13300			19600	12900
				* 18750	17600	* 13100	9000	9200	6050			8900	5850

*Load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated loads do not exceed 87% of hydraulic lift capacity or 75% of tipping load.



STANDARD EQUIPMENT

- 3 Speed travel with Auto shift
- Alternator, 90 Ampere, 24V
- AM/FM radio
- Automatic engine warm-up system
- Automatic air conditioner/heater
- Auto idle
- Auto Idle Shutdown (programmable)
- Lever lock Auto-lock
- Auxiliary input (3.5 mm jack)
- Batteries, large capacity
- Battery disconnect switch
- Boom and arm holding valves
- Carrier rollers (2 each side)
- Converter, (2) x 12V
- Counterweight, 4670 kg **10,296 lb**
- Dry type air cleaner, double element
- Electric horn
- EMMS monitoring system
- Engine, Komatsu SAA6D107E-3
- Extended work equipment grease interval
- Fan guard structure
- Fuel system pre-cleaner 10 micron
- High back air suspension seat, with heat
- Hydraulic track adjusters
- KOMTRAX® Level 5.0
- Large LCD color monitor, high resolution
- Lock lever
- Mirrors, (LH and RH)
- Operator Protective Top Guard (OPG), Level 1
- Operator Identification System
- Pattern change valve (ISO to BH control)
- Power maximizing system
- PPC hydraulic control system
- Pump/engine room partition cover
- Radiator and oil cooler dustproof net
- Rear reflectors
- Rearview monitoring system (1 camera)
- Revolving frame deck guard
- Revolving frame undercovers
- ROPS cab
- Seat belt, retractable, 76 mm **3"**
- Seat belt indicator
- Secondary engine shutoff switch
- Service valve
- Shoes, triple grouser, 800 mm **31.5"**
- Skylight
- Slip resistant foot plates
- Starter motor, 5.5kW/24V x 1
- Suction fan
- Thermal and fan guards
- Track frame undercover
- Track frame swivel guard
- Travel alarm
- Working lights, 2 (boom and RH front)
- Working mode selection system



OPTIONAL EQUIPMENT

- Arms
 - 3045 mm **10'0"** arm assembly
 - 3045 mm **10'0"** HD arm assembly with piping
 - 3500 mm **11'6"** arm assembly
- Booms
 - 5850 mm **19'2"** boom assembly
 - 5850 mm **19'2"** HD boom assembly with piping
- Cab guards
 - Full front guard, OPG Level 1
 - Full front guard, OPG Level 2
 - Bolt-on top guard, OPG Level 2
 - Lower front window guard
- High pressure in-line hydraulic filters
- Hydraulic control unit, 1 actuator
- Proportional control handles
- Rain visor
- Revolving frame undercovers, heavy duty
- Shoes, triple grouser, 700 mm **28"**
- Sun visor
- Straight travel pedal
- Track roller guards, full length
- Working light, front, two additional cab mounted



ATTACHMENT OPTIONS

- Cab air pre-cleaner
- Grade control systems
- Hydraulic couplers
- Hydraulic kits, field installed
- Super long fronts
- PSM thumbs
- Rockland thumbs
- Vandalism protection guards with storage box

For a complete list of available attachments, please contact your local Komatsu distributor.



Note: All comparisons and claims of improved performance made herein are made with respect to the prior Komatsu model unless otherwise specifically stated.