

# KOMATSU®

## PC360LC-11

*Tier 4 Final Engine*

### HYDRAULIC EXCAVATOR



\*Photos may include optional equipment.

#### NET HORSEPOWER

257 HP @ 1950 rpm  
192 kW @ 1950 rpm

#### OPERATING WEIGHT

78,645–80,547 lb  
35,627–36,535 kg

#### BUCKET CAPACITY

0.89–2.56 yd<sup>3</sup>  
0.68–1.96 m<sup>3</sup>

# PC360LC

# WALK-AROUND

PC360LC-11



Photos may include optional equipment.

## NET HORSEPOWER

257 HP @ 1950 rpm  
192 kW @ 1950 rpm

## OPERATING WEIGHT

78,645–80,547 lb  
35,627–36,535 kg

## BUCKET CAPACITY

0.89–2.56 yd<sup>3</sup>  
0.68–1.96 m<sup>3</sup>





## GREATER PERFORMANCE & FASTER CYCLE TIMES

Komatsu's Closed-center Load Sensing System (CLSS) provides quick response and smooth operation to maximize productivity.

Power Mode with enhanced engine and hydraulic pump control logic provides greater hydraulic power and speed for faster cycle times, improved multifunction performance and up to 12% greater productivity than the previous model.

A powerful **Komatsu SAA6D114E-6 engine** provides a net output of 192 kW **257 HP**. This engine is EPA Tier 4 Final emissions certified.

**Variable Geometry Turbocharger (VGT)** uses a hydraulic actuator to provide optimum air flow under all speed and load conditions.

**Diesel Particulate Filter (DPF) and Selective Catalytic Reduction (SCR) system** reduce particulate matter and NOx while providing automatic regeneration that does not interfere with daily operation.

**Large displacement high efficiency pumps** provide high flow output at lower engine speed, improving efficiency.

**6 Working modes** are designed to match engine speed, pump delivery and system pressure to the application.

### Power Mode

provides improved power and hydraulic flow for faster cycle times and multifunction operation.

**Two boom mode settings** provide power mode for maximum digging force or smooth mode for fine grading operations.

### Komatsu's Closed-center Load Sensing System (CLSS)

provides quick response and smooth operation to maximize productivity.

**Rearview monitoring system (standard)** with integrated camera display in the default monitor screen.

The **KOMTRAX®** telematics system is standard on Komatsu equipment with no subscription fees throughout the life of the machine. Using wireless technology, KOMTRAX® transmits valuable information such as location, utilization, and maintenance records to a PC or smartphone app. Custom machine reports are provided for identifying machine efficiency and operating trends. KOMTRAX® also provides advanced machine troubleshooting capabilities by continuously monitoring machine health.

### Large LCD color monitor:

- 7" high resolution display
- Enhanced hydraulic attachment control with one way/two way flow and programmable work tool names and settings
- Rear view camera display integrated into the default monitor screen
- Key machine settings and controls easily accessible through the monitor



### Enhanced working environment

- High back, heated air suspension seat with adjustable arm rests
- Integrated ROPS cab design
- Cab meets ISO Level 1 Operator Protective Guard (OPG) top guard
- Standard pattern change valve to switch between ISO and BH control pattern
- Auxiliary jack and (2) 12V power outlets
- Auto climate control

### Komatsu designed and manufactured components

**Handrails (standard)** located on the machine's upper structure provide a convenient work area in front of the engine.

**Battery disconnect switch** allows a technician to disconnect the power supply before servicing the machine.

**Heavy duty boom** design with large one piece castings provide increased strength and durability.

**Komatsu Auto Idle Shutdown** helps reduce nonproductive engine idle time and reduces operating costs.

**Operator Identification System** records KOMTRAX® machine operation and application data for up to 100 individual ID codes.

# PERFORMANCE FEATURES

## KOMATSU NEW ENGINE TECHNOLOGIES


### Komatsu's New Emission Regulations-compliant Engine

New regulations effective in 2014 require the reduction of NOx emissions to one tenth or below from the preceding regulations. In addition to refining the Tier 4 Interim technologies, Komatsu has developed a new Selective Catalytic Reduction (SCR) device in-house.

### Technologies Applied to New Engine



#### Heavy-duty aftertreatment system

This new system combines a Diesel Particulate Filter (DPF) and Selective Catalytic Reduction (SCR). The SCR NOx reduction system injects the correct amount of Diesel Exhaust Fluid (DEF) at the proper rate, thereby decomposing NOx into non-toxic water vapor (H<sub>2</sub>O) and nitrogen gas (N<sub>2</sub>).

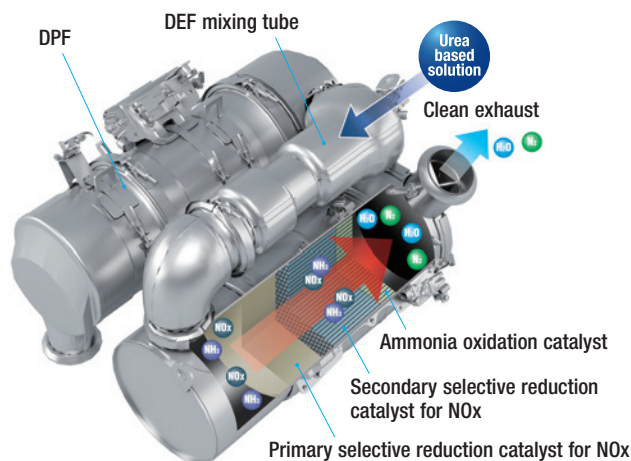

#### Heavy-duty cooled Exhaust Gas Recirculation (EGR) system

The system recirculates a portion of exhaust gas into the air intake and lowers combustion temperatures, thereby reducing NOx emissions. EGR gas flow has been decreased for Tier 4 Final with the addition of SCR technology. The system achieves a dynamic reduction of NOx, while helping reduce fuel consumption below Tier 4 Interim levels.

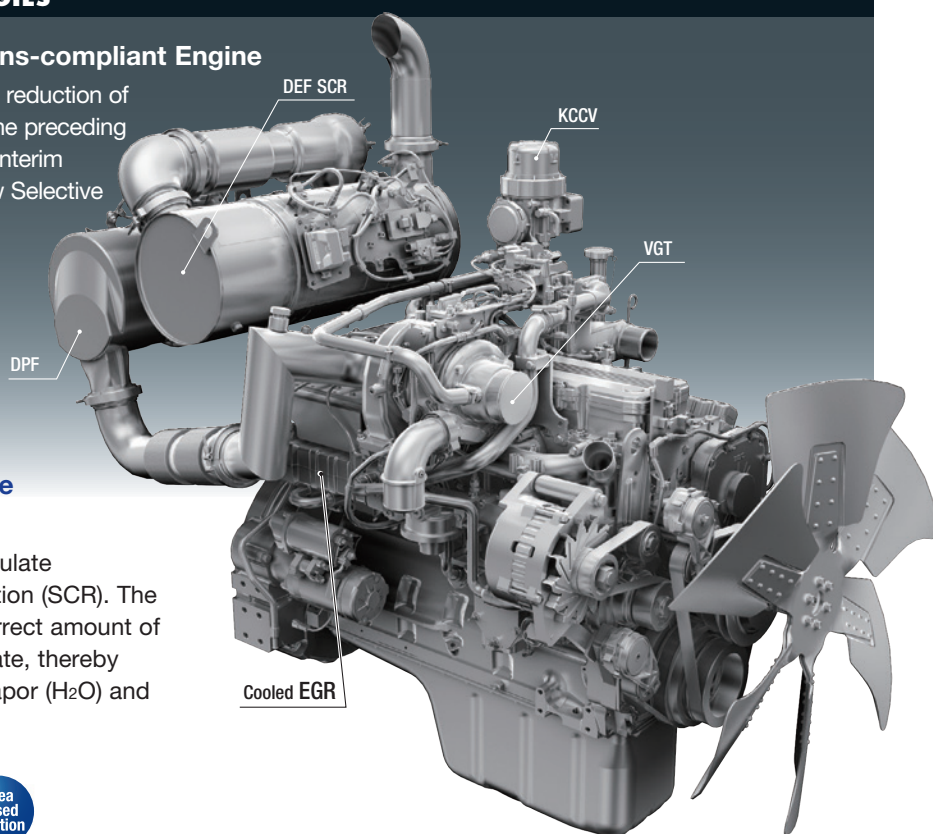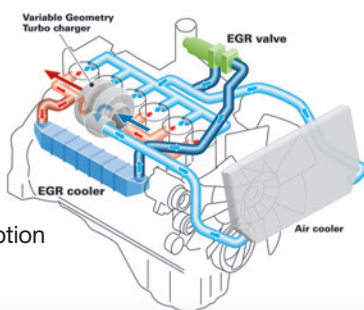


#### Advanced Electronic Control System

The electronic control system performs high-speed processing of all signals from sensors installed in the vehicle providing total control of equipment in all conditions of use. Engine condition information is displayed via an on-board network to the monitor inside the cab, providing necessary information to the operator. Additionally, managing the information via KOMTRAX helps customers keep up with required maintenance.

#### Variable Geometry Turbocharger (VGT) system

The VGT system features proven Komatsu-designed hydraulic technology for variable control of air-flow and supplies optimal air according to load conditions. The upgraded version provides better exhaust temperature management.

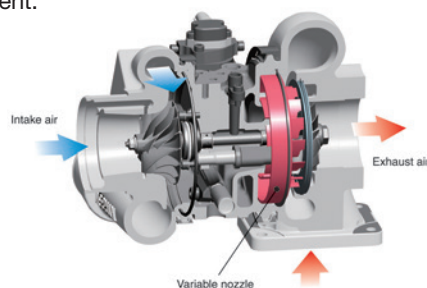




### Komatsu Auto Idle Shutdown

Komatsu auto idle shutdown automatically shuts the engine down after idling for a set period of time to reduce unnecessary fuel consumption and exhaust emissions. The amount of time before the engine is shutdown can be easily programmed from 5 to 60 minutes.



### Heavy-Duty High-Pressure Common Rail (HPCR) Fuel Injection System

The system is designed to achieve an optimal injection of high-pressure fuel by means of computerized control, providing close to complete combustion to reduce PM emissions. While this technology is already used in current engines, the new system uses high pressure injection, thereby reducing both PM emissions and fuel consumption over the entire range of engine operating conditions. The Tier 4 Final engine has advanced fuel injection timing for reduced fuel consumption and lower soot levels.

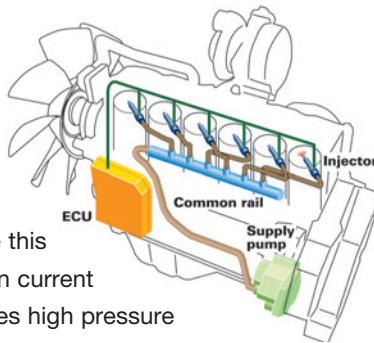

### Enhanced Productivity

The PC360LC-11's P Mode provides improved performance in demanding applications.

#### Productivity

**Up to 12% increase**  
(compared to the PC360LC-10 in P Mode)

P mode (90° swing truck loading)

### Increased Work Efficiency

#### Large digging force

With the one-touch Power Max. function, digging force is increased for 8.5 seconds of operation.

#### Maximum arm crowd force (ISO)

**160 kN(16.3t) ➔ 171 kN(17.4t) 7% UP**  
(With Power Max.)

#### Maximum bucket digging force (ISO)

**213 kN(21.7t) ➔ 228 kN(23.2t) 7% UP**  
(With Power Max.)

Measured with Power Max. function, 3185 mm arm and ISO rating

#### Faster arm cycle speeds

Two return hoses improve arm cylinder hydraulic flow for faster arm out performance.

#### Two-mode settings for boom

- Smooth boom mode reduces boom down force for working on hard surfaces or for hydraulic hammer operation.
- Power boom mode maximizes digging force for more effective excavating

#### Lifting mode

When the Lifting mode is selected, lifting capacity is increased 7% by raising hydraulic pressure.



# WORKING ENVIRONMENT

PC360LC-11







## Comfortable Working Space

### Wide spacious cab

Wide spacious cab includes seat with reclining backrest. The seat height and longitudinal inclination are easily adjusted using a pull-up lever. You can set the appropriate operational posture of armrest together with the console. Reclining the seat further enables you to place it into the fully flat state with the headrest attached.

### Armrest with simple height adjustment function

A plunger and lock permits simple and fast adjustments for armrest height.



### Low vibration with cab damper mounting

### Automatic climate control

### Pressurized cab

### Auxiliary input jack

An auxiliary audio input makes it easy to connect a device to play audio through the standard speakers.



## Standard Equipment

### Sliding window glass (left side)




### Lockout Tagout Ready



### Remote intermittent wiper with windshield washer



### Tie Off Points Standard (ISO 14567)



### Opening & closing skylight



### Magazine box & cup holder



### Defroster (conforms to the ISO standard)



### One-touch storable front window lower glass



# WORKING ENVIRONMENT

PC360LC-11

## LARGE HIGH RESOLUTION LCD MONITOR



### New Monitor Panel Interface Design

An updated large high resolution LCD color monitor enables accurate and smooth work. The interface has been redesigned to display key machine information in a new user friendly interface. A rear view camera and a DEF level gauge display have been added to the default main screen. The interface has a function that enables the main screen mode to be switched, thus enabling the optimum screen information for the particular work situation to be displayed.

#### Indicators


- |                                    |                             |
|------------------------------------|-----------------------------|
| 1 Auto-decelerator                 | 8 Fuel gauge                |
| 2 Working mode                     | 9 DEF level gauge           |
| 3 Travel speed                     | 10 Service meter, clock     |
| 4 Ecology gauge                    | 11 Fuel consumption gauge   |
| 5 Camera display                   | 12 Guidance icon            |
| 6 Engine coolant temperature gauge | 13 Function switches        |
| 7 Hydraulic oil temperature gauge  | 14 Camera direction display |
|                                    | 15 DEF level caution lamp   |

#### Basic operation switches

- |                         |                         |
|-------------------------|-------------------------|
| 1 Auto-decelerator      | 4 Buzzer cancel         |
| 2 Working mode selector | 5 Wiper                 |
| 3 Travel speed selector | 6 Window washer         |
|                         | 7 Auto climate controls |

### Switchable Display Modes

The main screen display mode can be changed by pressing the F3 key.

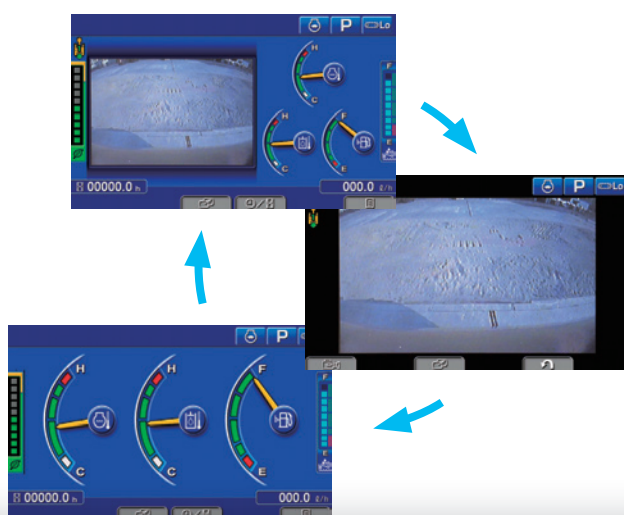

### Visual user menu

Pressing the F6 key on the main screen displays the user menu screen. The menus are grouped for each function, and use easy-to-understand icons which enable the machine to be operated easily.



- |                                       |                    |
|---------------------------------------|--------------------|
| 1 Energy saving guidance              | 2 Machine settings |
| 3 Aftertreatment devices regeneration | 4 SCR information  |
| 5 Maintenance                         | 6 Monitor setting  |
|                                       | 7 Message check    |



## Support Efficiency Improvement

### Ecology guidance

While the machine is operating, ecology guidance pops up on the monitor screen to notify the operator of the status of the machine in real time.

### Ecology gauge & fuel consumption gauge

The monitor screen is provided with an ecology gauge and also a fuel consumption gauge which is displayed continuously. In addition, the operator can set any desired target value of fuel consumption (within the range of the green display), enabling the machine to be operated with better fuel economy.



Ecology gauge      Fuel consumption gauge  
Ecology guidance

### Operator Identification Function

An identification ID can be set up for individual operator, application or jobs, and used to manage operation information of individual machines using KOMTRAX data. Data sent from KOMTRAX can be used to analyze operation status by operator as well as by machine.




### Operation record, fuel consumption history, and ecology guidance record


The ecology guidance menu enables the operator to check the operation record, fuel consumption history and ecology guidance record from the ecology guidance menu, using a single touch, thus enabling the total fuel consumption to be reduced.



Operation record



Fuel consumption history




Ecology guidance record





# MAINTENANCE FEATURES

PC360LC-11

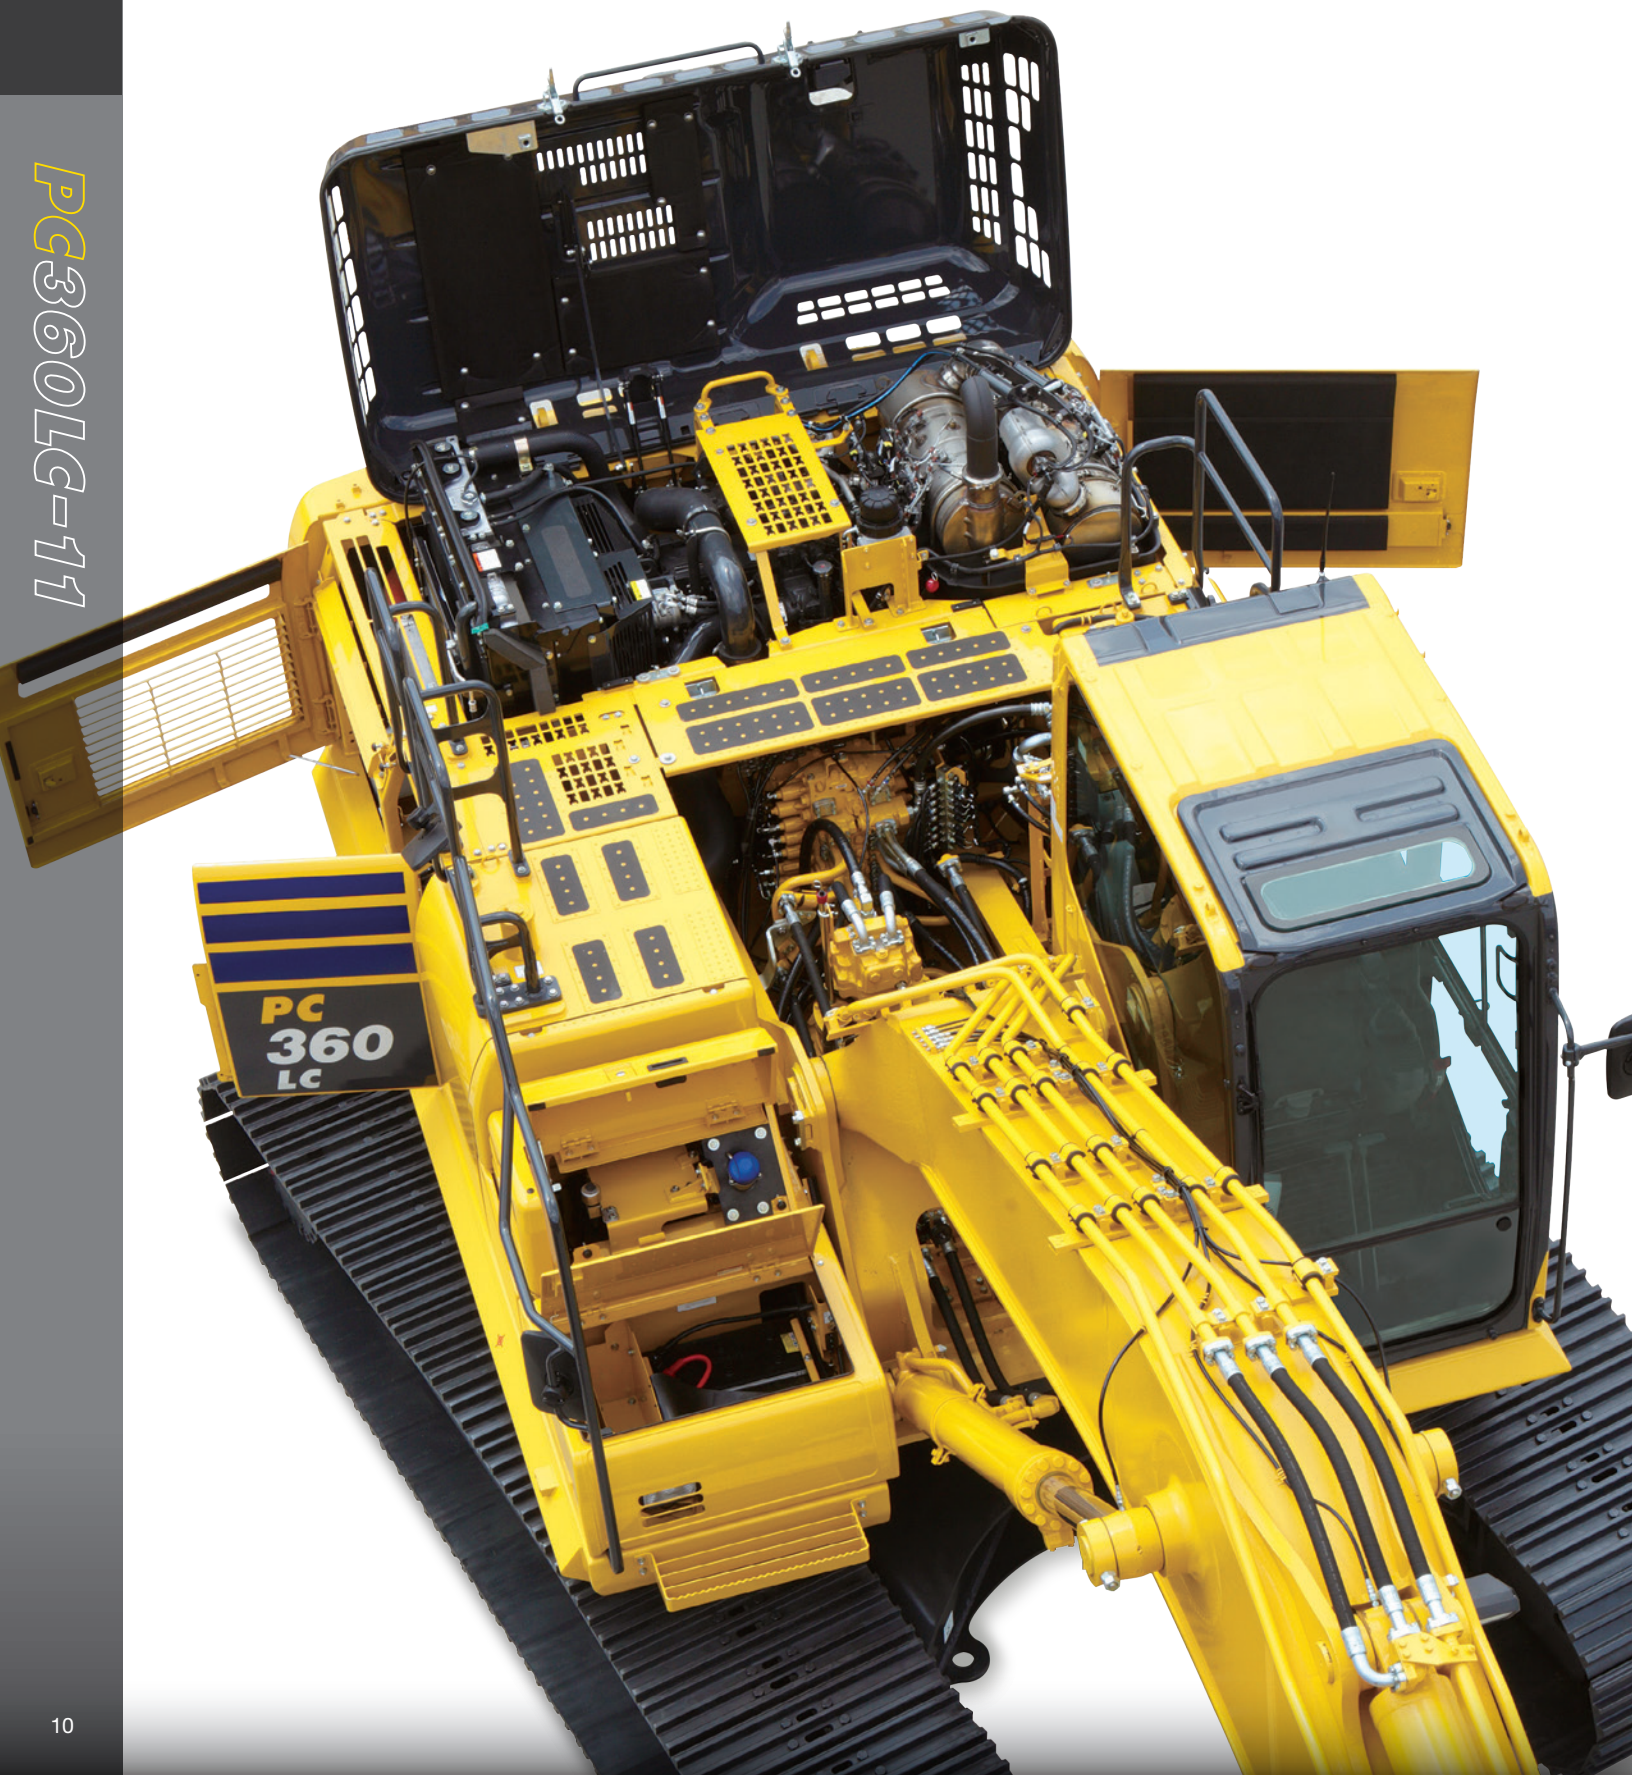




## Large capacity air cleaner

The larger air cleaner can extend air cleaner life during long-term operation and helps prevent early clogging, and resulting power loss. A radial seal design is used for reliability.



## Engine Access

Large rear opening hood provides excellent maintenance and service access to key engine components.



## Fuel Filters

Large high-efficiency fuel filter and pre-filter with water separator removes contaminants from fuel for improved fuel injection system life. Built-in priming pump simplifies maintenance.



High efficiency fuel filter

Fuel pre-filter (with water separator)

## Easy access to engine oil filter and fuel drain valve

Engine oil filter and fuel drain valve are remote mounted to improve accessibility.



## Battery disconnect switch

A standard battery disconnect switch allows a technician to disconnect the power supply and lock out before servicing the machine.



## Air conditioner filter

The air conditioner filter can be removed and installed without the use of tools for easy filter maintenance.

### Washable cab floormat


### Sloping track frame

### Long-life oils, filters

Engine oil & engine oil filter	every 500 hours
Hydraulic oil	every 5000 hours
Hydraulic oil filter	every 1000 hours

## DT-type connectors

Sealed DT-type electrical connectors provide high reliability, water and dust resistance.

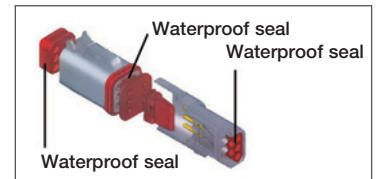

## Diesel Exhaust Fluid (DEF) tank

A large tank volume extends operating time before refilling and is installed on the right front platform for easy access. DEF tank and pump are separated for improved service access.



## Maintenance Information

### "Maintenance time caution lamp" display

When the remaining time to maintenance becomes less than 30 hours\*, a maintenance time monitor appears. Pressing the F6 key switches the monitor to the maintenance screen.

\* : The setting can be changed within the range between 10 and 200 hours.



Maintenance screen

### Manual Stational Regeneration

Under most conditions, active regeneration will occur automatically with no effect on machine operation. In case the operator needs to disable active regeneration or initiate a manual stationary regeneration, this can be easily accomplished through the monitor panel. A soot level indicator is displayed to show how much soot is trapped in the DPF.



Aftertreatment device regeneration screen

### Supports the DEF level and refill timing

The DEF level gauge is displayed continuously on the right side of the monitor screen. In addition, when DEF level is low, DEF low level guidance messages appear in pop up displays to inform the operator in real time.



DEF level gauge

DEF low level guidance

# MAINTENANCE FEATURES


## Drawbar Pull

The Komatsu designed final drives and undercarriage provide high drawbar pull for good maneuverability and performance when working on adverse grades or soft ground.



## Grease Sealed Track

The PC360LC-11 uses grease sealed tracks for extended undercarriage life.

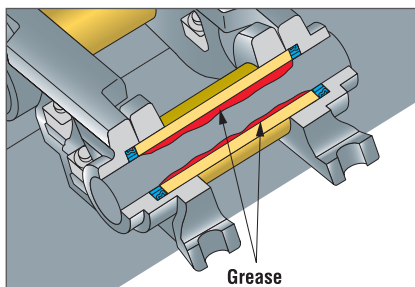

## Large Displacement High Efficiency Pump


Large displacement hydraulic implement pumps provide high flow output at lower engine RPMs as well as operation at the most efficient engine speed.



## Working Mode Selection

The PC360LC-11 excavator is equipped with six working modes (P, E, L, B, ATT/P and ATT/E). Power Mode provides improved hydraulic power and faster cycle times for improved performance in demanding applications. Each mode is designed to match engine speed, pump flow, and system pressure to the application. The PC360LC-11 features an attachment mode (ATT/E) that allows operators to run attachments while in Economy mode.

Working Mode	Application	Advantage
<b>P</b>	Power Mode	•Maximum production, power & multifunction
<b>E</b>	Economy Mode	•Good cycle times with reduced fuel consumption
<b>L</b>	Lifting Mode/ Fine Control	•Increased lifting power & fine control
<b>B</b>	Breaker Mode	•One way flow for hydraulic breaker operation
<b>ATT/P</b>	Attachment Power Mode	•Two way flow with maximum power
<b>ATT/E</b>	Attachment Economy Mode	•Two way flow with most efficient fuel economy

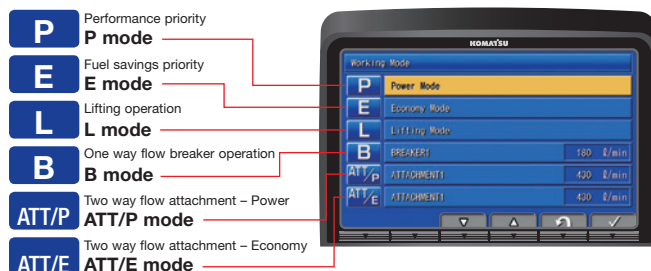

## High Rigidity Work Equipment

Booms and arms are constructed with thick plates of high tensile strength steel. In addition, these structures are designed with large cross sectional areas and large one piece castings in the boom foot, the boom tip, and the arm tip. The result is work equipment that exhibits long term durability and high resistance to bending and torsional stress. A standard HD boom design provides increased strength and reliability.





# GENERAL FEATURES

## ROPS CAB STRUCTURE

### ROPS Cab (ISO 12117-2)


The machine is equipped with a ROPS cab that conforms to ISO 12117-2 for excavators as standard equipment. It also satisfies the requirements for Level 1 Operator Protective Guard (OPG) and top guard (ISO 10262).



## Rear View Monitoring System

A new rear view monitoring system display has a rear view camera image that is continuously displayed together with the gauges and important vehicle information. This enables the operator to carry out work while easily checking the surrounding area.

Rear view camera




Rear view image on monitor



## Low Vibration with Viscous Cab Mounts

The PC360LC-11 uses viscous mounts for the cab that incorporate a longer stroke and the addition of a spring. The cab damper mounting combined with a high rigidity deck reduces vibration at the operator's seat.

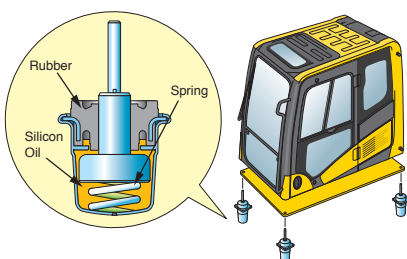

## General Features

**Secondary engine shut down switch** at base of seat to shutdown the engine.



**Seat belt caution indicator**



**Lock lever**

**Retractable seat belt**

**Tempered & tinted glass**

**Large cab entrance step**

**Left and right side handrails**

**Large mirrors**

**Slip-resistant plates**

**Thermal and fan guards**

**Pump/engine compartment partition**

**Travel alarm**



# KOMATSU PARTS & SERVICE SUPPORT



## KOMATSU CARE Program Includes:

\*The PC360LC-11 comes standard with complimentary factory scheduled maintenance for the first 3 Years or 2,000 Hours, whichever occurs first.

### Planned Maintenance Intervals at:

500/1000/1500/2000 hour intervals. (250 hr. initial interval for some products) Complimentary Maintenance Interval includes: Replacement of Oils & Fluid Filters with genuine Komatsu Parts, 50-Point Inspection, Komatsu Oil & Wear Analysis Sampling (KOWA) / Travel & Mileage (distance set by distributor; additional charges may apply)

### Benefits of Using Komatsu CARE

- Assurance of Proper Maintenance with OEM Parts & Service
- Increased Uptime & Efficiency
- Factory Certified Technicians Performing Work
- Cost of Ownership Savings
- Transferable Upon Resale

### Complimentary DPF Exchange

The PC360LC-11 comes standard with 2 Complimentary DPF Exchange units for the first 5 Years or 9000 hours whichever occurs first. The suggested DPF Exchange unit service intervals are 4500 hours & 9000 hours. End user must have authorized Komatsu distributor perform the removal & installation of the DPF.

### Complimentary SCR Maintenance

The PC360LC-11 also includes 2 factory recommended services of the Selective Catalytic Reduction (SCR) Diesel Exhaust Fluid (DEF) system during the first 5 Years or 9000 hours whichever occurs first. The service includes factory recommended DEF tank flush & strainer cleaning at the suggested service intervals of 4500 hours & 9000 hours.

Interval PM	500	1000	1500	2000
KOWA SAMPLING (Engine, Hydraulics, Swing Circle, L & R Final Drives)	✓	✓	✓	✓
LUBRICATE MACHINE	✓	✓	✓	✓
LUBRICATE SWING CIRCLE	✓	✓	✓	✓
CHECK SWING PINION GREASE LEVEL AND ADD, WHEN NECESSARY	✓	✓	✓	✓
CHANGE ENGINE OIL	✓	✓	✓	✓
REPLACE ENGINE OIL FILTER	✓	✓	✓	✓
REPLACE FUEL PRE-FILTER	✓	✓	✓	✓
REPLACE AC FRESH & RECIRC AIR FILTERS	✓	✓	✓	✓
CLEAN AIR CLEANER ELEMENT	✓	✓	✓	✓
DRAIN SEDIMENT FROM FUEL TANK	✓	✓	✓	✓
COMPLETE 50 POINT INSPECTION FORM; LEAVE PINK COPY WITH CUSTOMER OR IN CAB	✓	✓	✓	✓
RESET MONITOR PANEL MAINTENANCE COUNTER FOR APPROPRIATE ITEMS	✓	✓	✓	✓
REPLACE HYDRAULIC TANK BREATHER ELEMENT		✓		✓
REPLACE DEF TANK BREATHER ELEMENT		✓		✓
CHECK OIL LEVEL IN DAMPER CASE, ADD WHEN NECESSARY		✓		✓
REPLACE MAIN FUEL FILTER		✓		✓
CHANGE SWING MACHINERY OIL		✓		✓
REPLACE HYDRAULIC OIL FILTER ELEMENT		✓		✓
CLEAN HYDRAULIC TANK STRAINER				✓
CHANGE FINAL DRIVE OIL				✓
REPLACE KCCV FILTER ELEMENT				✓
REPLACE DEF PUMP FILTER				✓
FACTORY TRAINED TECHNICIAN LABOR	✓	✓	✓	✓
2 DPF Exchanges suggested at 4,500 Hrs and 9,000 Hrs.				
2 SCR System Maintenance Services suggested at 4,500 Hrs. and 9000 Hrs.				

## Komatsu CARE® – Extended Coverage

- Extended Coverage can provide peace of mind by protecting customers from unplanned expenses that effect cash flow
- Purchasing extended coverage locks-in the cost of covered parts and labor for the coverage period and helps turn these into fixed costs



## Komatsu Parts Support

- 24/7/365 to fulfill your parts needs
- 9 parts Distribution Centers strategically located across the U.S. and Canada
- Distributor network of more than 300 locations across U.S. and Canada to serve you
- Online part ordering through Komatsu eParts
- Remanufactured components with same-as-new warranties at a significant cost reduction



## Komatsu Oil and Wear Analysis (KOWA)

- KOWA detects fuel dilution, coolant leaks, and measures wear metals
- Proactively maintain your equipment
- Maximize availability and performance
- Can identify potential problems before they lead to major repairs
- Reduce life cycle cost by extending component life

\* Certain exclusions and limitations apply. Refer to the customer certificate for complete program details and eligibility. Komatsu® and Komatsu Care® are registered trademarks of Komatsu Ltd. Copyright 2017 Komatsu America Corp.



# KOMTRAX EQUIPMENT MONITORING

GET THE WHOLE STORY WITH  
**KOMTRAX®**

## ✓ WHAT

- KOMTRAX is Komatsu's remote equipment monitoring and management system
- KOMTRAX **continuously monitors and records** machine health and operational data
- Information such as fuel consumption, utilization, and a detailed history **lowering owning and operating cost**

## ✓ WHEN

- Know when your machines are **running or idling** and make decisions that will improve your fleet utilization
- Detailed movement records ensure you know when and where your equipment is moved
- Up to date records allow you to **know when maintenance is due** and help you plan for future maintenance needs

## ✓ WHERE

- KOMTRAX data **can be accessed virtually anywhere** through your computer, the web or your smart phone
- Automatic alerts keep fleet managers up to date on the latest machine notifications

## ✓ WHY

- Knowledge is power - **make informed decisions** to manage your fleet better
- Knowing your idle time and fuel consumption will help maximize your machine efficiency
- **Take control of your equipment** - any time, anywhere

## ✓ WHO

- KOMTRAX is **standard** equipment on all Komatsu construction products



**KOMTRAX®**

For construction and compact equipment.

**KOMTRAX Plus®**

For production and mining class machines.

# SPECIFICATIONS



## ENGINE

Model.....Komatsu SAA6D114E-6\*  
 Type.....Water-cooled, 4-cycle, direct injection  
 Aspiration.....Variable Geometry Turbocharger  
 with air-to-air aftercooler and EGR  
 Number of cylinders..... 6  
 Bore..... 114 mm **4.49"**  
 Stroke.....144.5 mm **5.69"**  
 Piston displacement..... 8.85 ltr **540 in³**  
 Horsepower:  
 SAE J1995.....Gross 202 kW **271 HP**  
 ISO 9249 / SAE J1349 ..... Net 192 kW **257 HP**  
 Rated rpm..... 1950  
 Governor..... All-speed control, electronic  
 Fan drive method for radiator cooling ..... Mechanical

\*EPA Tier 4 Final emissions certified



## HYDRAULICS

Type ...HydrauMind (Hydraulic Mechanical Intelligence) system,  
 closed-center system with  
 load sensing valve and pressure compensated valves,  
 6 selectable working modes

Main pump:

Pumps for.....Boom, arm, bucket, swing, and travel circuits  
 Type.....Variable displacement axial piston type  
 Maximum flow ..... 535 ltr/min **141.3 gal/min**  
 Supply for control circuit..... Self reducing valve

Hydraulic motors:

Travel ..... 2 x axial piston motors with parking brake  
 Swing ..... 1 x axial piston motor with swing holding brake

Relief valve setting:

Implement circuits ..... 37.3 MPa 380 kgf/cm² **5,400 psi**  
 Travel circuit..... 37.3 MPa 380 kgf/cm² **5,400 psi**  
 Swing circuit..... 27.9 MPa 285 kgf/cm² **4,050 psi**  
 Pilot circuit..... 3.2 MPa 33 kgf/cm² **470 psi**

Hydraulic cylinders:

(Number of cylinders – bore x stroke x rod diameter)

Boom .... 2–140 mm x 1480 mm x 100 mm **5.5" x 58.3" x 3.9"**  
 Arm ..... 1–160 mm x 1825 mm x 110 mm **6.3" x 71.9" x 4.3"**  
 Bucket..... for 3.2 m **10'5"** and 4.0 m **13'2"** Arms  
 1–140 mm x 1285 mm x 100 mm **5.5" x 50.6" x 3.9"**  
 .....for 2.54 m **8'4"** Arm  
 1–150 mm x 1285 mm x 110 mm **5.9" x 50.6" x 4.3"**



## DRIVES AND BRAKES

Steering control.....Two lever with pedals  
 Drive method ..... Hydrostatic  
 Maximum drawbar pull ..... 290 kN 29570 kgf **65,191 lbf**  
 Gradeability..... 70%, 35°  
 Maximum travel speed (auto shift):

High..... 5.5 km/h **3.4 mph**  
 Mid..... 4.2 km/h **2.8 mph**  
 Low ..... 3.2 km/h **2.0 mph**

Service brake..... Hydraulic lock

Parking brake..... Mechanical disc brake



## SWING SYSTEM

Driven by..... Hydraulic motor  
 Swing reduction..... Planetary gear  
 Swing circle lubrication ..... Grease-bathed  
 Service brake..... Hydraulic lock  
 Holding brake/Swing lock..... Mechanical disc brake  
 Swing speed..... 9.5 rpm  
 Swing torque..... 11386 kg•m **82,313 ft lbs**



## UNDERCARRIAGE

Center frame..... X-frame  
 Track frame..... Box-section  
 Track type ..... Sealed  
 Track adjuster ..... Hydraulic  
 Number of shoes (each side)..... 48  
 Number of carrier rollers (each side)..... 2  
 Number of track rollers (each side)..... 8



## COOLANT & LUBRICANT CAPACITY (REFILLING)

Fuel tank ..... 605 ltr **159.8 U.S. gal**  
 Radiator ..... 37 ltr **9.7 U.S. gal**  
 Engine..... 35 ltr **9.2 U.S. gal**  
 Final drive, each side.....9.0 ltr **2.4 U.S. gal**  
 Swing drive..... 13.7 ltr **3.6 U.S. gal**  
 Hydraulic tank ..... 188 ltr **49.7 U.S. gal**  
 Diesel Exhaust Fluid (DEF) tank ..... 39 ltr **10.3 U.S. gal**



## SOUND PERFORMANCE

Exterior – ISO 6395.....103 dB(A)

Interior – ISO 6396.....71 dB(A)



## OPERATING WEIGHT (APPROXIMATE)

Operating weight includes 6500 mm **21'3"** one-piece HD boom, 3185 mm **10'5"** arm, SAE heaped 1.96 m³ **2.56 yd³** bucket, rated capacity of lubricants, coolant, full fuel tank, operator, and standard equipment.

Triple-Grouser Shoes	Operating Weight	Ground Pressure (ISO 16754)
700 mm	35748 kg	0.59 kg/cm²
<b>28"</b>	<b>78,645 lb</b>	<b>8.34 psi</b>
800 mm	36129 kg	0.52 kg/cm²
<b>31.5"</b>	<b>79,483 lb</b>	<b>7.38 psi</b>
850 mm	36509 kg	0.50 kg/cm²
<b>33.5"</b>	<b>80,320 lb</b>	<b>7.02 psi</b>



## WORKING FORCES

	Arm Length	2540 mm 8'4"	3185 mm 10'5"	4020 mm 13'2"
ISO rating	Bucket	229 kN	200 kN	200 kN
	digging force	23300 kgf / <b>51,370 lb</b>	20400 kgf / <b>44,970 lb</b>	20400 kgf / <b>44,970 lb</b>
	Arm	193 kN	165 kN	139 kN
	crowd force	19700 kgf / <b>43,430 lb</b>	16800 kgf / <b>37,040 lb</b>	14200 kgf / <b>31,310 lb</b>
SAE rating	Bucket	259 kN	228 kN	227 kN
	digging force	26400 kgf / <b>58,200 lb</b>	23200 kgf / <b>51,150 lb</b>	23100 kgf / <b>50,930 lb</b>
	Arm	201 kN	171 kN	144 kN
	crowd force	20500 kgf / <b>45,190 lb</b>	17400 kgf / <b>38,360 lb</b>	14700 kgf / <b>32,410 lb</b>

## Component Weights

Arm including bucket cylinder and linkage  
 3185 mm **10'5"** arm assembly ..... 1761 kg **3,882 lb**  
 4020 mm **13'2"** arm assembly ..... 1988 kg **4,383 lb**  
 One piece HD boom including arm cylinder  
 6500 mm **21'3"** boom assembly ..... 3135 kg **6,912 lb**  
 Boom cylinders x 2 ..... 259 kg **571 lb**  
 Counterweight ..... 6920 kg **15,255 lb**







## DIMENSIONS

	Arm Length	3185 mm	10'5"	4020 mm	13'2"
A	Overall length	11145 mm	36'7"	11170 mm	36'8"
B	Length on ground (transport)	5935 mm	19'6"	5475 mm	18'0"
C	Overall height (to top of boom)*	3285 mm	10'9"	3760 mm	12'4"
D	Overall width	3440 mm	11'3"		
E	Overall height (to top of cab)*	3160 mm	10'4"		
F	Overall height (to top of handrail)*	3255 mm	10'8"		
G	Ground clearance, counterweight	1185 mm	3'11"		
H	Ground clearance, minimum	498 mm	1'8"		
I	Tail swing radius	3445 mm	11'4"		
J	Track length on ground	4030 mm	13'3"		
K	Track length	4955 mm	16'3"		
L	Track gauge	2590 mm	8'6"		
M	Width of crawler	700 mm 28" shoe	3290 mm	10'7"	
		800 mm 31.5" shoe	3390 mm	11'1"	
		850 mm 33.5" shoe	3440 mm	11'3"	
N	Shoe width	850 mm	33.5"		
O	Grouser height	36 mm	1.4"		
P	Machine height to top of engine cover	3135 mm	10'3"		
Q	Machine upper width **	3145 mm	10'4"		
R	Distance, swing center to rear end	3405 mm	11'2"		

\*: Including grouser height

\*\*: Including handrail

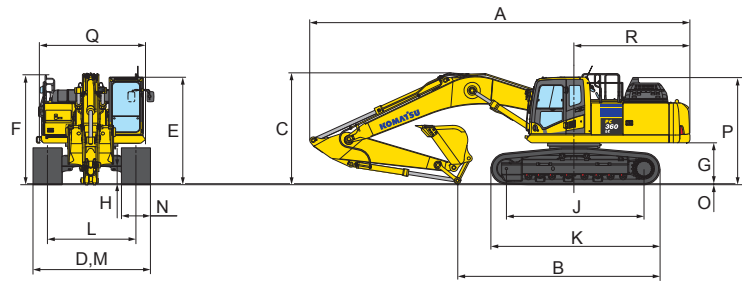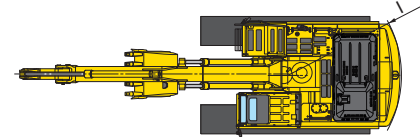

## BACKHOE BUCKET, ARM AND BOOM COMBINATION

Bucket Type	Bucket								6.5 m (21'3") Boom		
	Capacity		Teeth	Width		Weight		Tip Radius		3.2 m (10'5")	4.0 m (13'2")
Komatsu TL	0.93 m³	1.21 yd³	4	762 mm	30"	1097 kg	2418 lb	1674 mm	65.9"	●	●
	1.18 m³	1.54 yd³	4	914 mm	36"	1198 kg	2641 lb	1674 mm	65.9"	●	●
	1.44 m³	1.88 yd³	5	1067 mm	42"	1325 kg	2921 lb	1674 mm	65.9"	●	●
	1.70 m³	2.22 yd³	5	1219 mm	48"	1426 kg	3144 lb	1674 mm	65.9"	●	○
	1.96 m³	2.56 yd³	6	1372 mm	54"	1554 kg	3425 lb	1674 mm	65.9"	○	□
Komatsu HP	0.68 m³	0.89 yd³	3	610 mm	24"	1022 kg	2254 lb	1674 mm	65.9"	●	●
	0.93 m³	1.21 yd³	4	762 mm	30"	1178 kg	2598 lb	1674 mm	65.9"	●	●
	1.18 m³	1.54 yd³	4	914 mm	36"	1358 kg	2993 lb	1674 mm	65.9"	●	●
	1.44 m³	1.88 yd³	5	1067 mm	42"	1439 kg	3173 lb	1674 mm	65.9"	●	●
	1.70 m³	2.22 yd³	5	1219 mm	48"	1555 kg	3429 lb	1674 mm	65.9"	●	□
Komatsu HPS	1.96 m³	2.56 yd³	6	1372 mm	54"	1701 kg	3750 lb	1674 mm	65.9"	□	⊙
	0.68 m³	0.89 yd³	3	610 mm	24"	1112 kg	2451 lb	1674 mm	65.9"	●	●
	0.93 m³	1.21 yd³	4	762 mm	30"	1294 kg	2853 lb	1674 mm	65.9"	●	●
	1.18 m³	1.54 yd³	4	914 mm	36"	1437 kg	3167 lb	1674 mm	65.9"	●	●
	1.44 m³	1.88 yd³	5	1067 mm	42"	1607 kg	3543 lb	1674 mm	65.9"	●	○
Komatsu HPX	1.70 m³	2.22 yd³	5	1219 mm	48"	1750 kg	3857 lb	1674 mm	65.9"	○	□
	1.96 m³	2.56 yd³	6	1372 mm	54"	1921 kg	4236 lb	1674 mm	65.9"	□	⊙
	0.68 m³	0.89 yd³	3	610 mm	24"	1239 kg	2731 lb	1674 mm	65.9"	●	●
	0.93 m³	1.21 yd³	4	762 mm	30"	1421 kg	3133 lb	1674 mm	65.9"	●	●
	1.18 m³	1.54 yd³	4	914 mm	36"	1564 kg	3447 lb	1674 mm	65.9"	●	●
Komatsu HPX	1.44 m³	1.88 yd³	5	1067 mm	42"	1734 kg	3823 lb	1674 mm	65.9"	●	○
	1.70 m³	2.22 yd³	5	1219 mm	48"	1877 kg	4137 lb	1674 mm	65.9"	○	□
	1.96 m³	2.56 yd³	6	1372 mm	54"	2048 kg	4516 lb	1674 mm	65.9"	□	⊙

● - Used with material weights up to 3,500 lb/yd<sup>3</sup> - Quarry/rock/high abrasion applications  
 □ - Used with material weights up to 2,500 lb/yd<sup>3</sup> - General construction


○ - Used with material weights up to 3,000 lb/yd<sup>3</sup> - Tough digging applications  
 ○ - Used with material weights up to 2,000 lb/yd<sup>3</sup> - Light materials applications  
 X - Not useable

Komatsu recommends the use of buckets sized to machine capacity. Buckets listed in the table above are sized appropriate to the specified material densities. Buckets exceeding recommended sizes may result in reduced performance

# SPECIFICATIONS



## WORKING RANGE

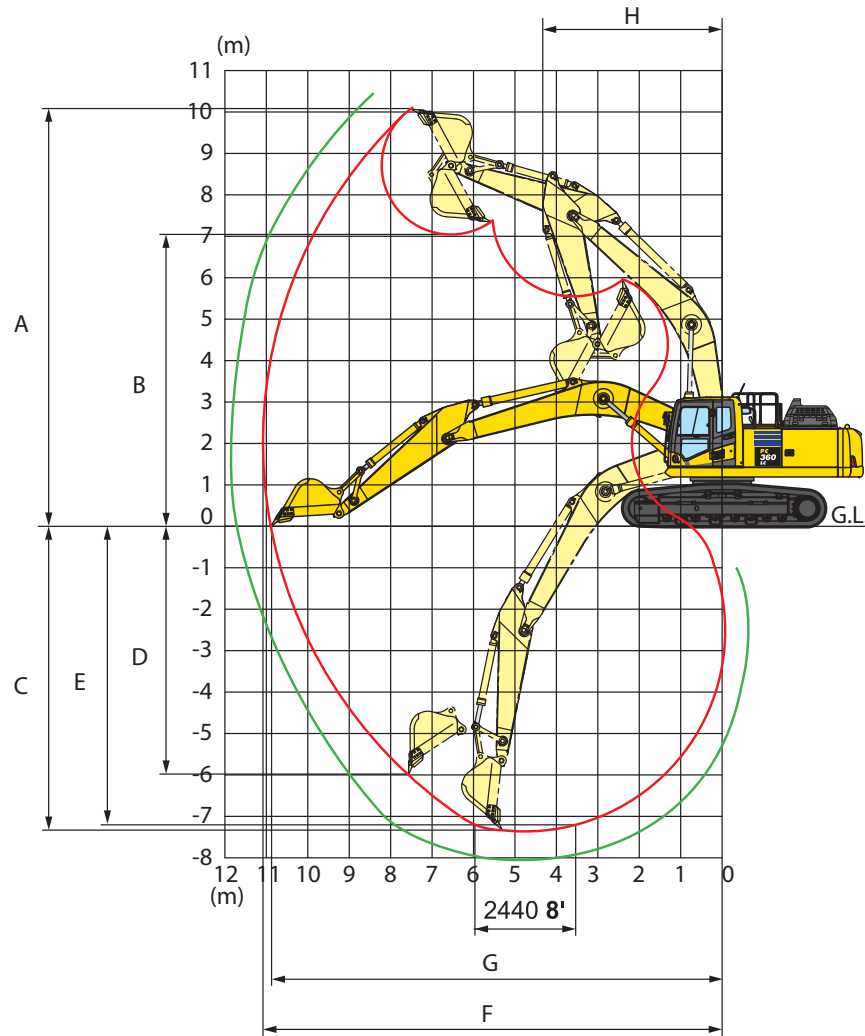


	Arm Length	3185 mm 10'5"	4020 mm 13'2"
<b>A</b>	Max. digging height	10210 mm 33'6"	10550 mm 34'7"
<b>B</b>	Max. dumping height	7110 mm 23'4"	7490 mm 24'7"
<b>C</b>	Max. digging depth	7380 mm 24'3"	8180 mm 26'10"
<b>D</b>	Max. vertical wall digging depth	6480 mm 21'3"	7280 mm 23'11"
<b>E</b>	Max. digging depth for 8' level bottom	7180 mm 23'7"	8045 mm 26'5"
<b>F</b>	Max. digging reach	11100 mm 36'5"	11900 mm 39'1"
<b>G</b>	Max. digging reach at ground level	10920 mm 35'10"	11730 mm 38'6"
<b>H</b>	Min. swing radius	4310 mm 14'2"	4320 mm 14'2"
<b>SAE rating</b>	Bucket digging force at power max.	200 kN 20400 kg / 44,970 lb	200 kN 20400 kg / 44,970 lb
	Arm crowd force at power max.	165 kN 16800 kg / 37,040 lb	139 kN 14200 kg / 31,310 lb
<b>ISO rating</b>	Bucket digging force at power max.	228 kN 23200 kg / 51,150 lb	227 kN 23100 kg / 50,930 lb
	Arm crowd force at power max.	171 kN 17400 kg / 38,360 lb	144 kN 14700 kg / 32,410 lb



# LIFT CAPACITIES



## LIFTING CAPACITY WITH LIFTING MODE



A: Reach from swing center  
B: Bucket hook height  
C: Lifting capacity  
Cf: Rating over front  
Cs: Rating over side  
⊗: Rating at maximum reach

Conditions :  
• 6500 mm 21' 3" one-piece boom  
• Bucket: None  
• Lifting mode: On

Arm: 3185 mm 10'5"

Shoes: 700 mm 28"


Unit: kg lb

B	A		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'													* 7250	* 7250
6.1 m 20'									* 8890	7530			* 15980	* 15980
4.6 m 15'									* 19590	16600			* 7050	6390
3.0 m 10'									* 9370	7370			* 15540	14080
1.5 m 5'									* 20650	16240			* 7100	2690
0 m 0'													* 15650	5930
-1.5 m -5'	* 13710	* 13710	* 17720	* 13480	* 12090	* 9710	* 10030	7140	8160	5520	* 7380	5340	* 16270	11770
-3.0 m -10'	* 30220	* 30220	* 39060	* 29710	* 26650	* 21400	* 22110	15740	17980	12160	* 16270	11770	* 7740	5210
-4.6 m -15'	* 20540	* 20540	* 15850	* 13360	* 13220	* 9290	10410	6910	8050	5410	* 7100	2690	* 17060	11480
	* 45280	* 45280	* 34940	* 29450	* 27110	* 19680	* 20810	14810	17740	11920	* 17060	11480	* 8870	6430
	* 15670	* 15670	* 12560	* 9590	* 9130	10230	6750	7960	5340	7910	5300		* 8350	8170
	* 34540	* 34540	* 27690	* 21140	* 20120			17540	11770	17430	11680		* 18400	18010

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.



## LIFTING CAPACITY WITH LIFTING MODE



A: Reach from swing center  
B: Bucket hook height  
C: Lifting capacity  
Cf: Rating over front  
Cs: Rating over side  
⊗: Rating at maximum reach

Conditions :  
• 6500 mm 21' 3" one-piece boom  
• Bucket: None  
• Lifting mode: On

Arm: 3185 mm 10'5"

Shoes: 800 mm 31.5"

Unit: kg lb


B	A		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'													* 7250	* 7250
6.1 m 20'									* 8890	7600			* 15900	* 15900
4.6 m 15'									* 19600	16700			* 7050	6440
3.0 m 10'									* 9370	7430			* 15500	14200
1.5 m 5'									* 20600	16300			* 7100	5750
0 m 0'													* 15600	12600
-1.5 m -5'	* 13710	* 13710	* 17720	* 13380	* 12090	* 9790	* 10030	7200	8240	5570	* 7380	5390	* 16200	11800
-3.0 m -10'	* 30200	* 30200	* 39000	* 29500	* 26600	* 21500	* 22100	15800	18100	12200	* 16200	11800	* 7820	5260
-4.6 m -15'	* 20540	* 20540	* 15850	* 13490	* 13220	* 9370	10510	6980	8120	5460	* 7820	5260	* 17200	11600
	* 45200	* 45200	* 34900	* 29700	* 27100	* 19800	* 20800	14900	17900	12000	* 17200	11600	* 8870	6490
	* 15670	* 15670	* 12560	* 9590	* 9210	10330	6810	8040	5390	7990	5360		* 8350	8250
	* 34500	* 34500	* 27600	* 21100	* 20300			17700	11800	17600	11800		* 18400	18100

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.

# LIFT CAPACITIES



## LIFTING CAPACITY WITH LIFTING MODE



A: Reach from swing center  
B: Bucket hook height  
C: Lifting capacity  
Cf: Rating over front  
Cs: Rating over side  
⊗: Rating at maximum reach

Conditions :  
• 6500 mm 21' 3" one-piece boom  
• Bucket: None  
• Lifting mode: On


Arm: 3185 mm 10'5" Shoes: 850 mm 33.5" Unit: kg lb

B	A	3.0 m 10'	4.6 m 15'	6.1 m 20'	7.6 m 25'	9.1 m 30'	MAX
		Cf	Cs	Cf	Cs	Cf	Cs
7.6 m							* 7250 * 7250
25'							* 15900 * 15900
6.1 m					* 8890 7630		* 7050 6470
20'					* 19600 16800		* 15500 14200
4.6 m				* 10740 10300	* 9370 7460		* 7100 5770
15'				* 23600 22700	* 20600 16400		* 15600 12700
3.0 m			* 16210 14690	* 12090 9830	* 10030 7230	5590	* 7380 5410
10'			* 35700 32300	* 26600 21600	* 22100 15900	18200	* 12300 * 11900
1.5 m			* 18180 13880	* 13220 9410	* 10560 7010	8160 5490	7850 5290
5'			* 40000 30600	* 29100 20700	* 23200 15400	18000 12100	* 17300 11600
0 m			* 18550 13520	* 13740 9140	* 10380 6840	8080 5410	8030 5380
0'			* 40900 29800	* 30200 20100	* 22800 15000	17800 11900	* 17700 11800
-1.5 m		* 13710 * 13710	* 17720 13450	* 13480 9020	* 10290 6770		8610 5740
-5'		* 30200 * 30200	* 39000 29600	* 29700 19900	* 22700 14900		* 18900 12600
-3.0 m		* 20540 * 20540	* 15850 13550	* 12300 9050	* 9440 6810		* 8870 6520
-10'		* 45200 * 45200	* 34900 29800	* 27100 19900	* 20800 15000		* 19500 14300
-4.6 m		* 15670 * 15670	* 12560 * 12560	* 9590 9260			* 8350 8290
-15'		* 34500 * 34500	* 27600 * 27600	* 21100 20400			* 18400 18200

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.



## LIFTING CAPACITY WITH LIFTING MODE



A: Reach from swing center  
B: Bucket hook height  
C: Lifting capacity  
Cf: Rating over front  
Cs: Rating over side  
⊗: Rating at maximum reach

Conditions :  
• 6500 mm 21' 3" one-piece boom  
• Bucket: None  
• Lifting mode: On

Arm: 4020 mm 13'2" Shoes: 700 mm 28" Unit: kg lb


B	A	3.0 m 10'	4.6 m 15'	6.1 m 20'	7.6 m 25'	9.1 m 30'	MAX
		Cf	Cs	Cf	Cs	Cf	Cs
7.6 m							* 5610 * 5610
25'							* 12360 * 12360
6.1 m					* 7950 7620	* 6550 5690	* 5460 5460
20'					* 17520 16790	* 14440 12540	* 12030 12030
4.6 m					* 8520 7410	* 7870 5610	* 5470 4940
15'					* 18780 16330	* 17350 12360	* 12050 10890
3.0 m			* 14340 * 14340	* 11020 9790	* 9280 7130	8130 5470	* 5640 4650
10'			* 31610 * 31610	* 24290 21580	* 20450 15710	17920 12050	* 12430 10250
1.5 m			* 16890 13770	* 12370 9260	* 10010 6840	5320 5950	4540
5'			* 37230 30350	* 27270 20410	* 22060 15070	17570 11720	* 13110 10000
0 m			* 18090 13140	* 13230 8870	* 10100 6610	7830 5190	* 6480 4600
0'		* 8320 * 8320	* 18340 * 18340	* 39880 28960	* 29160 19550	22260 14570	* 17260 11440
-1.5 m		* 12420 * 12420	* 17980 12900	* 13400 8660	9950 6470	7760 5130	7290 4840
-5'		* 27380 * 27380	* 39630 28430	* 29540 19090	21930 14260	17100 11300	* 16070 10670
-3.0 m		* 17840 * 17840	* 16780 12900	* 12760 8610	9920 6440		* 8040 5360
-10'		* 39330 * 39330	* 36990 28430	* 28130 18980	21860 14190		* 17720 11810
-4.6 m		* 19190 * 19190	* 14360 13100	* 11040 8730	* 8190 6570		* 7850 6420
-15'		* 42300 * 42300	* 31650 28880	* 24330 19240	* 18050 14480		* 17300 14150
-6.1 m		* 12720 * 12720	* 9970 * 9970	* 7010 * 7010			* 6940 * 6940
-20'		* 28040 * 28040	* 21980 * 21980	* 15450 * 15450			* 15300 * 15300

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.





## LIFTING CAPACITY WITH LIFTING MODE



- A: Reach from swing center  
 B: Bucket hook height  
 C: Lifting capacity  
 Cf: Rating over front  
 Cs: Rating over side  
 ☉: Rating at maximum reach

- Conditions :  
 • 6500 mm 21' 3" one-piece boom  
 • Bucket: None  
 • Lifting mode: On



Arm: 4020 mm 13'2"

Shoes: 800 mm 31.5"


Unit: kg lb

B	A		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'									* 7750	* 7750			* 5610	* 5610
									* 17000	* 17000			* 12300	* 12300
6.1 m 20'									* 7950	* 7680	* 6550	* 5740	* 5460	* 5460
									* 17500	* 16900	* 14400	* 12600	* 12000	* 12000
4.6 m 15'									* 8520	* 7470	* 7870	* 5660	* 5470	* 4980
									* 18700	* 16400	* 17300	* 12400	* 12000	* 10900
3.0 m 10'			* 14340	* 14340	* 11020	* 9870	* 9280	* 7190	* 8210	* 5520	* 5640	* 4700		
			* 31600	* 31600	* 24300	* 21700	* 20400	* 15800	* 18100	* 12100	* 12400	* 10300		
1.5 m 5'			* 16890	* 13900	* 12370	* 9350	* 10010	* 6900	* 8040	* 5370	* 5950	* 4590		
			* 37200	* 30600	* 27200	* 20600	* 22000	* 15200	* 17700	* 11800	* 13100	* 10100		
0 m 0'	* 8320	* 8320	* 18090	* 13270	* 13230	* 8960	* 10200	* 6670	* 7910	* 5240	* 6480	* 4640		
	* 18300	* 18300	* 39800	* 29200	* 29100	* 19700	* 22500	* 14700	* 17400	* 11500	* 14200	* 10200		
-1.5 m -5'	* 12420	* 12420	* 17980	* 13030	* 13400	* 8740	* 10050	* 6530	* 7840	* 5180	* 7330	* 4890		
	* 27300	* 27300	* 39600	* 28700	* 29500	* 19200	* 22100	* 14400	* 17200	* 11400	* 16100	* 10700		
-3.0 m -10'	* 17840	* 17840	* 16780	* 13030	* 12760	* 8700	* 10020	* 6510			* 8040	* 5410		
	* 39300	* 39300	* 37000	* 28700	* 28100	* 19100	* 22000	* 14300			* 17700	* 11900		
-4.6 m -15'	* 19190	* 19190	* 14360	* 13230	* 11040	* 8810	* 8190	* 6640			* 7850	* 6480		
	* 42300	* 42300	* 31600	* 29100	* 24300	* 19400	* 18000	* 14600			* 17300	* 14300		

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.



## LIFTING CAPACITY WITH LIFTING MODE



- A: Reach from swing center  
 B: Bucket hook height  
 C: Lifting capacity  
 Cf: Rating over front  
 Cs: Rating over side  
 ☉: Rating at maximum reach

- Conditions :  
 • 6500 mm 21' 3" one-piece boom  
 • Bucket: None  
 • Lifting mode: On



Arm: 4020 mm 13'2"

Shoes: 850 mm 33.5"

Unit: kg lb

B	A		3.0 m 10'		4.6 m 15'		6.1 m 20'		7.6 m 25'		9.1 m 30'		MAX	
	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs	Cf	Cs
7.6 m 25'									* 7750	* 7750			* 5610	* 5610
									* 17000	* 17000			* 12300	* 12300
6.1 m 20'									* 7950	* 7720	* 6550	* 5770	* 5460	* 5460
									* 17500	* 17000	* 14400	* 12700	* 12000	* 12000
4.6 m 15'									* 8520	* 7500	* 7870	* 5690	* 5470	* 5010
									* 18700	* 16500	* 17300	* 12500	* 12000	* 11000
3.0 m 10'			* 14340	* 14340	* 11020	* 9910	* 9280	* 7220	* 8220	* 5550	* 5640	* 4720		
			* 31600	* 31600	* 24300	* 21800	* 20400	* 15900	* 18100	* 12200	* 12400	* 10400		
1.5 m 5'			* 16890	* 13960	* 12370	* 9390	* 10010	* 6940	* 8080	* 5400	* 5950	* 4610		
			* 37200	* 30700	* 27200	* 20700	* 22000	* 15300	* 17800	* 11900	* 13100	* 10100		
0 m 0'	* 8320	* 8320	* 18090	* 13330	* 13230	* 9000	* 10250	* 6710	* 7950	* 5270	* 6480	* 4660		
	* 18300	* 18300	* 39800	* 29400	* 29100	* 19800	* 22600	* 14700	* 17500	* 11600	* 14200	* 10200		
-1.5 m -5'	* 12420	* 12420	* 17980	* 13090	* 13400	* 8790	* 10100	* 6570	* 7880	* 5200	* 7330	* 4910		
	* 27300	* 27300	* 39600	* 28800	* 29500	* 19300	* 22200	* 14400	* 17300	* 11400	* 16100	* 10800		
-3.0 m -10'	* 17840	* 17840	* 16780	* 13090	* 12760	* 8740	* 10020	* 6540			* 8040	* 5440		
	* 39300	* 39300	* 37000	* 28800	* 28100	* 19200	* 22000	* 14400			* 17700	* 11900		
-4.6 m -15'	* 19190	* 19190	* 14360	* 13290	* 11040	* 8860	* 8190	* 6670			* 7850	* 6520		
	* 42300	* 42300	* 31600	* 29300	* 24300	* 19500	* 18000	* 14700			* 17300	* 14300		

\*Asterisk indicates load is limited by hydraulic capacity rather than tipping. Ratings are based on ISO standard No. 10567. Rated load capacity does not exceed 87% of hydraulic lift capacity or 75% of tipping load. Total weight of bucket and/or installed attachments must be deducted from the capacities shown above. Lift capacity chart is based on machine located on a solid, level and uniform surface. Load ratings are at the arm bucket pin location, use of any attachment point in a different location to handle objects could affect excavator lift performance.

# NOTES

PG360LG-11



# NOTES



## STANDARD EQUIPMENT

- 3 speed travel with auto shift
- Alternator, 90 Ampere, 24V
- AM/FM radio
- Arm holding valve
- Automatic engine warm-up system
- Automatic climate control/air conditioner/heater/defroster
- Auto idle
- Auto idle shut down, programmable
- Auxiliary input (3.5mm jack)
- Batteries, large capacity (2 x 12V)
- Battery master disconnect switch
- Belt-driven suction fan
- Boom holding valves
- Carrier rollers, (2 each side)
- Converter, (2) x 12V
- Counterweight, 6920 kg **15,255 lb**
- Dry type air cleaner, double element
- Electric fuel priming pump
- Electric horn
- Engine, Komatsu SAA6D114E-6
- Engine coolant to -25°C **-13°F**
- EMMS monitoring system
- Engine overheat prevention system
- Extended work equipment grease interval
- Fan guard structure
- Fuel system pre-filter 10 micron
- Grease sealed track chain
- High back air suspension seat, with heat
- Hydraulic track adjusters
- KOMTRAX® Level 5.0
- Large LCD color monitor, high resolution
- Lock lever
- Mirrors, (LH and RH)
- Operator Protective Top Guard (OPG), Level 1
- Operator identification system
- Pattern change valve (ISO to BH control)
- Power maximizing system
- PPC hydraulic control system
- Pump/engine room partition cover
- Radiator and oil cooler dustproof net
- Rear reflectors
- Rearview monitoring system (1 camera)
- Revolving frame deck guard
- Revolving frame undercovers
- ROPS cab (ISO12117-2)
- Seat belt indicator
- Seat belt, retractable, 76mm **3"**
- Secondary engine shutoff switch
- Service valve
- Skylight
- Slip resistant foot plates
- Starter motor, 11.0kW/24V x 1
- Thermal and fan guards
- Track frame swivel guard
- Track roller guards, center section
- Track rollers, 8 (each side)
- Track shoes, triple grouser, 800 mm **31.5"**
- Travel alarm
- Two boom mode settings
- Working lights, 2 (boom and RH front)
- Working mode selection system



## OPTIONAL EQUIPMENT

- Arms
  - 3185 mm **10'5"** arm assembly
  - 3185 mm **10'5"** arm assembly with piping
  - 4020 mm **13'2"** arm assembly
  - 4020 mm **13'2"** arm assembly with piping
- Booms
  - 6500 mm **21'3"** HD boom assembly
  - 6500 mm **21'3"** HD boom assembly with piping
- Cab guards
  - Lower front window guard
  - Full front guard, OPG Level 1
  - Full front guard, OPG Level 2
  - Bolt-on top guard, OPG Level 2
- Counterweight, 7400 kg **16,315 lb** with revolving frame reinforcement for use with super long fronts only
- High pressure in-line hydraulic filters
- Hydraulic control unit, 1 actuator
- Proportional control handles
- Rain visor
- Revolving frame undercovers, heavy duty
- Revolving frame undercovers, severe duty
- Sun visor
- Straight travel pedal
- Track roller guards, full length
- Track shoes, triple grouser, 700 mm **28"**
- Track shoes, triple grouser, 850 mm **33.5"**
- Track shoes, single grouser, 800 mm **31.5"**
- Working lights, front, two additional cab mounted



## ATTACHMENT OPTIONS

- Grade control systems
- Hydraulic couplers
- Hydraulic kits, field installed
- Load hold, anti-burst valves
- Material handler front
- Super long fronts
- PSM thumbs
- Rockland thumbs
- Vandalism protection guards with storage box

**For a complete list of available attachments, please contact your local Komatsu distributor.**



AESS874-05

©2019 Komatsu America Corp.

Printed in USA

AD06(1.5M)OTP

06/19 (EV-1)

# KOMATSU®

*Note: All comparisons and claims of improved performance made herein are made with respect to the prior Komatsu model unless otherwise specifically stated.*

[www.komatsuamerica.com](http://www.komatsuamerica.com)

Komatsu America Corp. is an authorized licensee of Komatsu Ltd. Materials and specifications are subject to change without notice

**KOMATSU®**, Komatsu Care®, KOMTRAX® and KOMTRAX Plus® are registered trademarks of Komatsu Ltd. All other trademarks and service marks used herein are the property of Komatsu Ltd., Komatsu America Corp. or their respective owners or licensees.