



ROTOBEC™
TOUGH HANDLING EQUIPMENT

Heavy-Duty **BUNCHING GRAPPLES**

by ROTOBEC

Appreciated by forestry contractors for their versatility, Rotobec's Bunching grapples excel in loading and unloading short and long wood in the forest.

Our bunching grapples are designed so that their jaws do not extend beneath ground level when the grapple closes, leaving branches and dirt on the ground. Their jaws also intersect, providing a firm grip on small logs as well.



**ROTOBEC INC.
HEAD OFFICE**

Tel: 418.383.3002
Fax: 418.383.5334
rotobec@rotobec.com

**ROTOBEC WEST
WESTERN CANADA & WESTERN USA**

Tel: 250.765.1161
Fax: 250.765.0035
rotobec@rotobec.com

ROTOBEC USA INC. EASTERN & CENTRAL

SALES NORTHEAST Tel: 518.572.4646
SALES LAKE STATES Tel: 616.250.0405
SALES SOUTHEAST Tel: 904.553.7850
SALES MIDSOUTH Tel: 423.208.6002
SALES MIDSOUTH Tel: 936.675.5394

PARTS & SERVICE
Tel: 603.444.2103
Fax: 603.444.0327
rotobec@rotobec.com

Heavy-Duty BUNCHING GRAPPLES



by **ROTOBEC**

TECHNICAL SPECIFICATIONS FOR BUNCHING GRAPPLES

Dimensions A thru G are in inches		SUPER HEAVY-DUTY MODELS			HEAVY-DUTY MODELS			
		F360SHD	F420SHD	F520SHD	F640HD	F800HD	F1000HD	F1250HD
MODEL								
Capacity in square meters		0.36	0.42	0.52	0.61	0.80	1.00	1.25
Capacity in cords of 8' wood (when tip to tip)		0.24	0.28	0.35	0.41	0.54	0.67	0.84
Capacity in cords of 8' wood (practical)		0.30	0.35	0.45	0.53	0.68	0.88	1.05
Deck area in square feet (when tip to tip)		3.9	4.5	5.6	6.6	8.6	10.8	13.5
A		4 3/4	5	6	7 1/2	7 3/4	9 1/2	11
B		73 1/2	77 3/8	83 3/8	96 3/4	107 3/4	118 3/8	126 1/8
C		77 3/4	83	89 3/8	102 3/4	115 1/8	124 3/4	134 3/4
D with rotator								
RT-252		48 3/8	50 1/2	53				
RT-502-STD					69 1/2	68 3/8	68	70 1/4
E		6 1/2	7 3/8	9 3/8	8 1/4	6 1/8	9 7/8	12 1/2
F		18 3/4	18 3/4	18 3/4	22 1/4	27 1/2	27 1/2	29 1/8
G		21 5/8	21 5/8	21 5/8	26 3/4	31 1/2	31 1/2	33 5/8
Height of grapple closed with								
RT-252		40 1/2	42	45				
RT-502-STD					70 3/4	51 7/8	52 3/4	57 1/2
Weight (lb) with rotator								
RT-252		1180	1220	1260				
RT-502-STD					2070	2675	2730	3075
Rotator, lifting capacity (lb)								
RT-252					25 000			
RT-502-STD					50 000			

Cylinders

- High pressure with double cushioning and integrated lock valve.
- Bolt-on cylinder heads for cost effective maintenance.

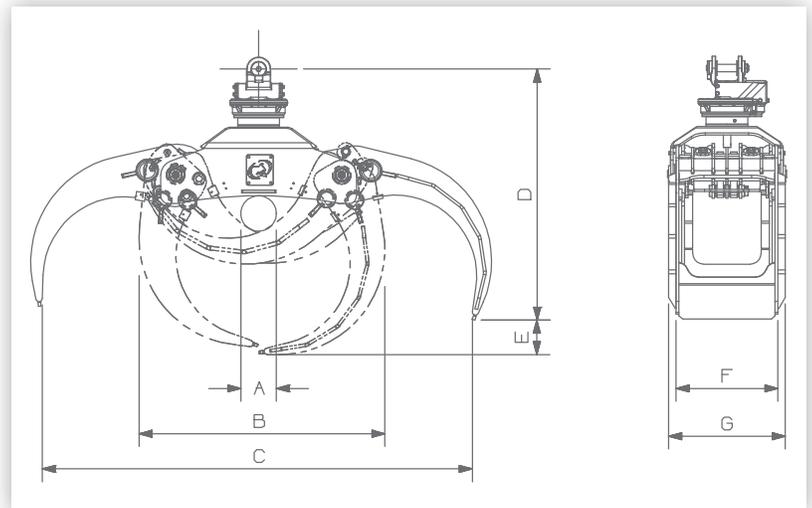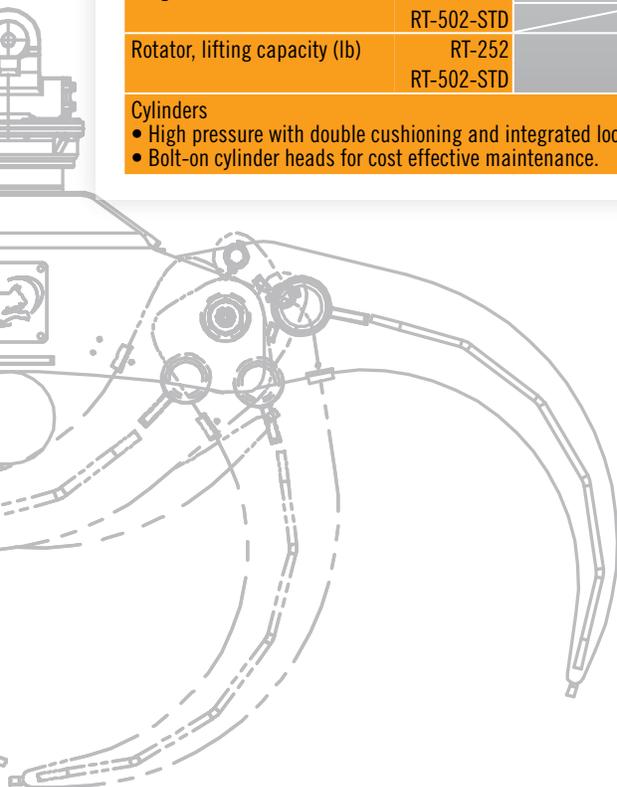

Printed in Canada V.0909-E-00



ROTOBEC™

www.rotobec.com