

# TB235-2



## Product Specifications

### OPERATING PERFORMANCE

Operating Weight - Canopy	7,253 lb	(3,290 kg)
Operating Weight - Cab	7,474 lb	(3,390 kg)
Maximum Bucket Breakout Force	9,127 lb	(4,140 kg)
Maximum Arm Digging Force	3,889 lb	(1,764 kg)
Arm Length	4 ft 9.0 in	(1,445 mm)
Slew Speed	9.3 rpm	
Traction Force	7,291 lb	(3,307 kg)
Ground Pressure - Canopy	4.4 psi	(30.4 kPa)
Ground Pressure - Cab	4.6 psi	(31.5 kPa)
Max Travel Speed		
Low Range	1.7 mph	(2.8 km/h)
High Range	2.7 mph	(4.4 km/h)

### HYDRAULIC SYSTEM

Total Hydraulic Flow	28.6 gpm	(108.4 Lpm)
Auxiliary Flow - Primary Circuit	15.8 gpm	(60.0 Lpm)
Hydraulic System Pressure	3,553 psi	(24.5 MPa)

### ENGINE

Make / Model	Yanmar / 3TNV88F	
Displacement	100.0 cu in (1.6 L)	
Horsepower @ 2,400 rpm	24.4 hp	(18.2 kW)
Maximum Torque @ 1,440 rpm	68 ft-lb	(92.2 Nm)

### FLUID CAPACITIES

Engine Lubrication	4.4 qt	(4.7 L)
Cooling System	4.2 qt	(4.0 L)
Fuel Tank Capacity	13.2 gal	(46.0 L)
Hydraulic Reservoir Capacity	9.2 gal	(35.0 L)
Hydraulic System Capacity	14.8 gal	(56.0 L)



## Takeuchi Fleet Management

- 2 Year Standard Service
- Utilization Tracking
- Minimize Downtime
- Proactive Maintenance
- Remote Diagnostics
- Control Costs

# TB235-2 Compact Excavator



## Machine Features

- |  |  |  |
|--|--|--|
| <p><b>ENGINE</b></p> <ul style="list-style-type: none"> <li>- U.S. EPA Final Tier 4</li> <li>- Automatic Fuel Bleed System</li> <li>- Dual Element Air Filter</li> <li>- Automatic Idle</li> </ul> <p><b>ELECTRICAL</b></p> <ul style="list-style-type: none"> <li>- LCD Informational Display (Canopy)</li> <li>- 5.7" Multi-Informational Display (Cab)</li> <li>- Sealed Rocker Switches</li> <li>- 12 volt System with 55 amp Alternator</li> <li>- Halogen Work Lights: Two Forward Facing</li> <li>- Engine Preheat</li> <li>- Hour Meter</li> <li>- Travel Alarm</li> <li>- Horn</li> </ul> | <p><b>UNDERCARRIAGE AND FRAME</b></p> <ul style="list-style-type: none"> <li>- Triple Flange Track Rollers</li> <li>- 2-Speed Travel with Automatic Shift</li> <li>- Sloped Frame with Open Centers</li> <li>- Heavy Duty Dozer Blade with Float</li> <li>- Large Wrap Around Counterweight</li> <li>- 11.8" Rubber Tracks</li> </ul> <p><b>OPERATOR'S STATION</b></p> <ul style="list-style-type: none"> <li>- ROPS / TOPS / OPG Four Post Canopy</li> <li>- Deluxe High Back Suspension Seat</li> <li>- Adjustable Arm Rests</li> <li>- 2" Retractable Seat Belt</li> <li>- 3" Retractable Seat Belt (optional)</li> <li>- Cab with A/C, Heat, Defrost, Windshield Wiper and Washer, Skylight w/ Sunshade, AM / FM / MP3 Radio, 12v Power Outlet (optional)</li> </ul> | <p><b>HYDRAULIC &amp; WORKING EQUIPMENT</b></p> <ul style="list-style-type: none"> <li>- Cushioned Boom and Swing Cylinders</li> <li>- Hydraulic Pilot Controls</li> <li>- Proportional Auxiliary Controls with Detent</li> <li>- Auxiliary Flow Adjustable from Operator's Seat</li> <li>- Hydraulic Reservoir with Fluid Level Sight Gauge</li> <li>- Primary Auxiliary Hydraulic Circuit Plumbed to Arm</li> <li>- Multiple Attachment Presets</li> <li>- Flow Selector Valve, Primary Auxiliary Circuit</li> <li>- Pattern Change Valve (ISO or SAE)</li> <li>- Pilot Accumulator</li> <li>- Main Boom Cylinder Guard</li> </ul> |
|--|--|--|

## Machine Dimensions

### MACHINE DIMENSIONS

A Maximum Reach	17 ft 2.9 in	(5,255 mm)
B Maximum Reach at Ground Level	16 ft 10.0 in	(5,130 mm)
C Maximum Digging Depth	10 ft 7.8 in	(3,245 mm)
D Maximum Vertical Digging Depth	8 ft 2.2 in	(2,495 mm)
E Maximum Dig Height	16 ft 5.2 in	(5,010 mm)
F Maximum Dumping Height	11 ft 9.5 in	(3,595 mm)
G Front Swing Radius	6 ft 6.9 in	(2,005 mm)
H Front Swing Radius with Boom Offset	5 ft 5.4 in	(1,660 mm)
I Tail Swing (Slew) Radius	4 ft 4.4 in	(1,330 mm)
J Transport Length	16 ft 0.9 in	(4,900 mm)
K Transport Height	8 ft 2.8 in	(2,510 mm)
L Ground Clearance	11 ft 6.0 in	(295 mm)
M Undercarriage Length	6 ft 11.1 in	(2,110 mm)
N Track Width (Rubber)	11.8 in	(300 mm)
O Undercarriage Width	5 ft 2.2 in	(1,580 mm)

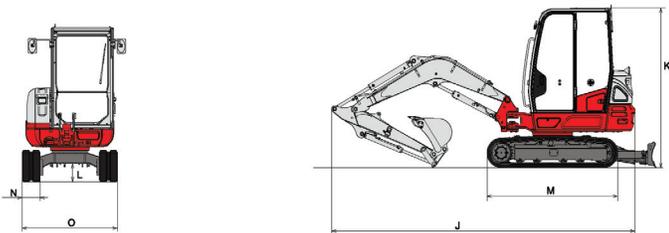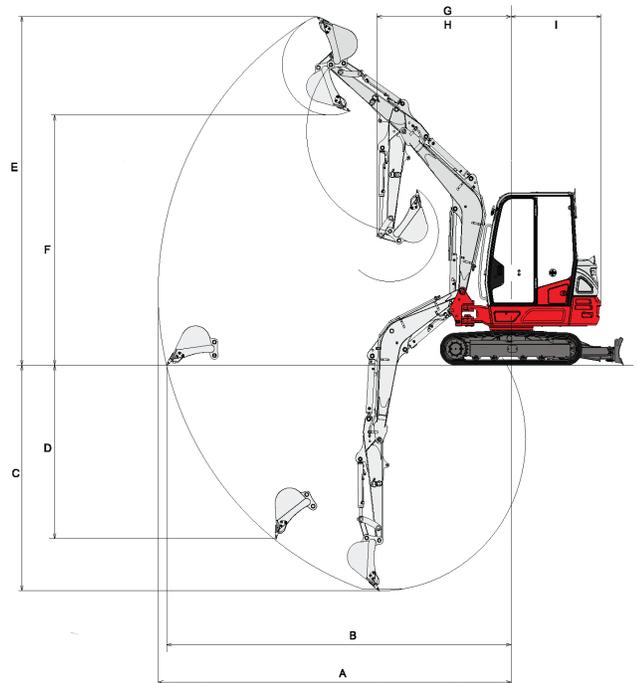

© 2017 Takeuchi Manufacturing (U.S.), Ltd. All Rights Reserved. Printed in the U.S.A. In accordance with our established policy of continued improvement, specifications and features are subject to change without notice. Pictures may show options other than standard equipment.

FORM: TB235-2 Compact Excavator Spec Sheet Sept. 2017

**TAKEUCHI**  
From World First to World Leader