

New FAE 200/U forestry mulcher for PT-300



The FAE **200/U** mulching head for PT-300 is the ideal choice for any land clearing job, including vegetation management and ROW clearing. It is built very robust to be used for very heavy-duty jobs. Due to its spiral rotor design it reduces vibrations, absorbs less power, and increases productivity.

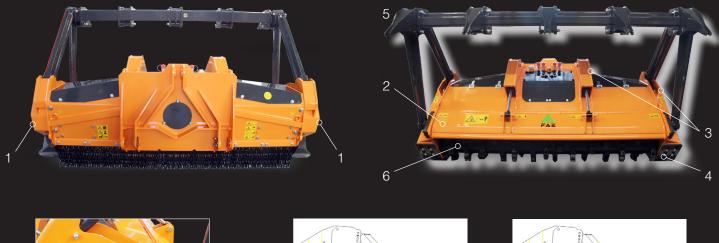

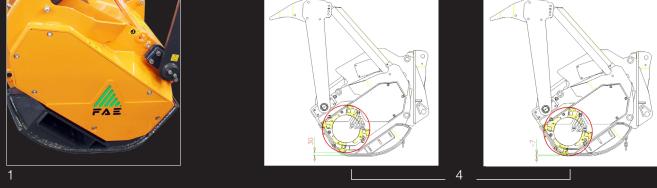


- 1. Reinforced side cover with extra new wear-resistant plate
- 2. Shorter and stronger hood
- 3. Hydraulic hoses of rear hood and guard frame integrated in the frame
- 4. Adjustable skids
- 5. Redesigned guard frame with improved mounting system and bigger cylinders with protected hoses.




6. Easily interchangeable counter blades (up to 3 lines), made of wear-resistant steel

7. Bolt-on plates made of Hardox and weld-on highly wear-resistant plates made of anti-wear steel alloys, ensure a greater resistance to wear and keep maintenance costs low

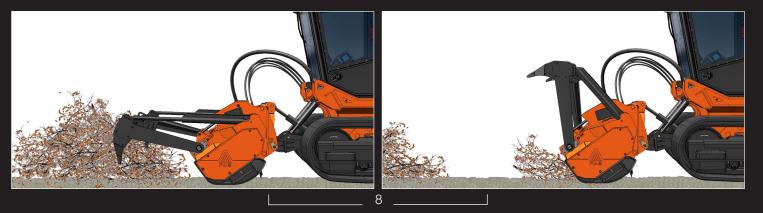

8. New raker teeth on guard frame. To drag logs and material and can be used as guide pins.

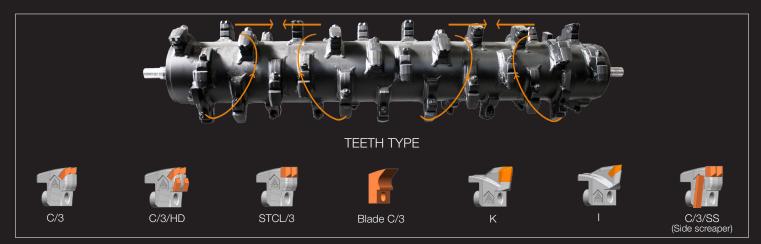

The double spiral rotor design ensures even distribution of the power over the entire width of the rotor, limits stresses to the structure, absorbs less power and enables even distribution of the mulched material. Wide range of interchangeable teeth are available for different working conditions.

TECHNICAL SPECIFICATIONS

> 200/U						
MODEL	200/U-200		200/U-210		200/U-225	
 Rotor diameter Overall width Working width Weight with options Max. working depth Grinding diameter (max) Quantity of cutting teeth tungsten carbide type "C/3" 	20 in 97 in 81 in 6239 lbs 3 in 14 in 42 + 2	500 mm 2475 mm 2060 mm 2830 kg 80 mm 350 mm	20 in 101 in 85 in 6349 lbs 3 in 14 in 44 + 2	500 mm 2560 mm 2150 mm 2880 kg 80 mm 350 mm	20 in 107 in 90 in 6460 lbs 3 in 14 in 46 + 2	500 mm 2714 mm 2300 mm 2930 kg 80 mm 350 mm
 Rotor rpm Hydraulic motor type (2)	2325 Danfoss	110 cc	2325 Danfoss	110 cc	2325 Danfoss	110 cc



FAE Group S.p.A. - PrimeTech Division

www.primetech.com // info@prime-tech.com

Via G. Marconi, 20 // 38011 Sarnonico (TN) // Italy // Tel. +39 0463 840 080 // Fax +39 0463 840 099



